


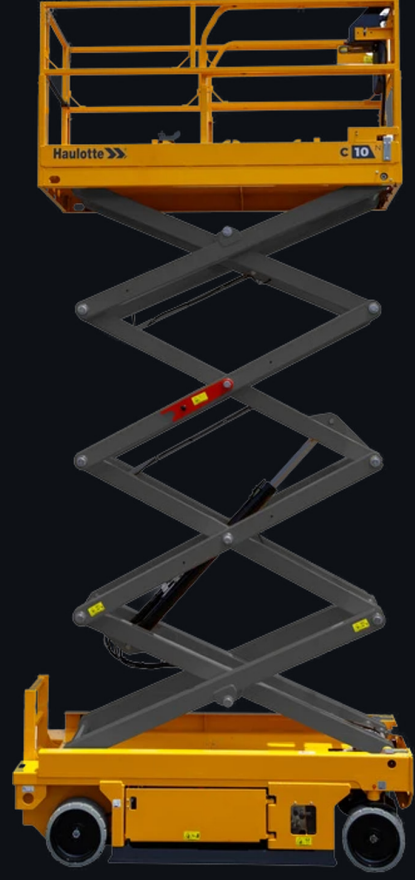

## MAKASLI PLATFORM

**C-Line C10 N / C12 / C14**

Akülü Makaslı Platform

Kapsadığı modeller: C10 N, C12, C14

**9,75 m**

Çalışma yüksekliği

**250 kg**

Kaldırma kapasitesi

**7,75 m**

Platform yüksekliği

**2.150 kg**


Ağırlık

**+90 216 999 95 99**

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ürün sayfası

## ELECTRIC SCISSOR LIFTS



**C10 N**  
**C12**  
**C14**



### ROBUST AND DURABLE DESIGN

- > Reinforced guardrails with additional vertical support
- > 6mm durable scissors with self-lubricated bush
- > Extra wear-resisting hydraulic hoses
- > 2 layers power coating
- > Special treatment for bolt/pins/bushes to ensure minimum 480h salt spray requirement

### LOW TCO

- > Diamond pattern platform floor
- > Common upper control box
- > Charger adapts different charging curve

### EASY MAINTENANCE

- > Battery and Hydraulic swing out tray
- > High capacity maintenance free battery


\* C10 N & C14: indoor only

**C10 N**  
**C12**  
**C14**

## ELECTRIC SCISSOR LIFTS


### TECHNICAL DATA

|                                         | <b>C10 N</b>           | <b>C12</b>             | <b>C14</b> |  |  |
|-----------------------------------------|------------------------|------------------------|------------|--|--|
| Working height                          | 9.75 m                 | 11.75 m                | 13.75 m    |  |  |
| Platform height                         | 7.75 m                 | 9.75 m                 | 11.75 m    |  |  |
| Lift capacity - inside                  | 250 kg<br>(2 pers.)    | 320 kg<br>(3 pers.)    |            |  |  |
| Lift capacity - outside                 | NA                     | 320 kg<br>(1 pers.)    | NA         |  |  |
| Lift capacity on the extension          | 120 kg                 |                        |            |  |  |
| <b>A</b> Platform length                | 2.42 m                 | 2.38 m                 |            |  |  |
| <b>B</b> Platform length - extended     | 3.31 m                 |                        |            |  |  |
| Length - extension                      | 0.92 m                 | 0.94 m                 |            |  |  |
| <b>C</b> Platform width - outside       | 0.80 m                 | 1.16 m                 |            |  |  |
| <b>D</b> Height - stowed                | 2.35 m                 | 2.44 m                 | 2.69 m     |  |  |
| Height - guardrails lowered             | 1.97 m                 | 1.72 m                 | 2.05 m     |  |  |
| <b>E</b> Overall width                  | 0.81 m                 | 1.20 m                 |            |  |  |
| <b>F</b> Length                         | 2.5 m                  |                        |            |  |  |
| <b>G</b> Wheelbase                      | 1.86 m                 |                        |            |  |  |
| <b>H</b> Ground clearance - center      | 12.2 cm                |                        |            |  |  |
| Ground clearance -<br>deployed potholes | 2 cm                   |                        |            |  |  |
| Micro Drive speed                       | 0.84 km/h              | 0.75 km/h              |            |  |  |
| Low Drive speed                         | 2 km/h                 |                        |            |  |  |
| Drive speed                             | 3.6 km/h               | 3.26 km/h              | 3 km/h     |  |  |
| Gradeability                            | 25 %                   |                        |            |  |  |
| Tilt (longitudinal/lateral)             | 3° / 1,5°              |                        |            |  |  |
| Turning radius - outside                | 2.42 m                 | 2.28 m                 |            |  |  |
| Non-marking tyres                       | 15 x 5                 |                        |            |  |  |
| Batteries                               | 24 V - 220<br>Ah (C20) | 24 V - 265<br>Ah (C20) |            |  |  |
| Hydraulic system capacity               | 27 l                   |                        |            |  |  |
| Weight                                  | 2 150 kg               | 3 000 kg               | 3 055 kg   |  |  |

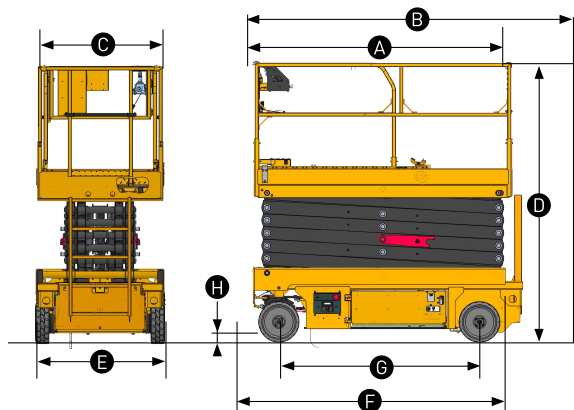

### STANDARD EQUIPMENT

- > Front steering & drive wheels
- > Hydraulic motor drive
- > Rear hydraulic brake
- > Powerpack with DC motor
- > Solid non-marking tires
- > 24V AGM Battery pack
- > 24V 30A Charger
- > Mobile upper control box
- > Spiral UCB cable
- > 2 drive speed selector
- > Low control box with cover
- > Battery Swing out tray
- > Powerpack swing out tray
- > Longitudinal forklift pockets
- > Foldable guardrails
- > Front platform extension
- > Drop bar entry
- > Central flashing light
- > Motion alarm
- > Manual emergency descent
- > Hydraulic pothole
- > Tilt alarm
- > Load sensing system

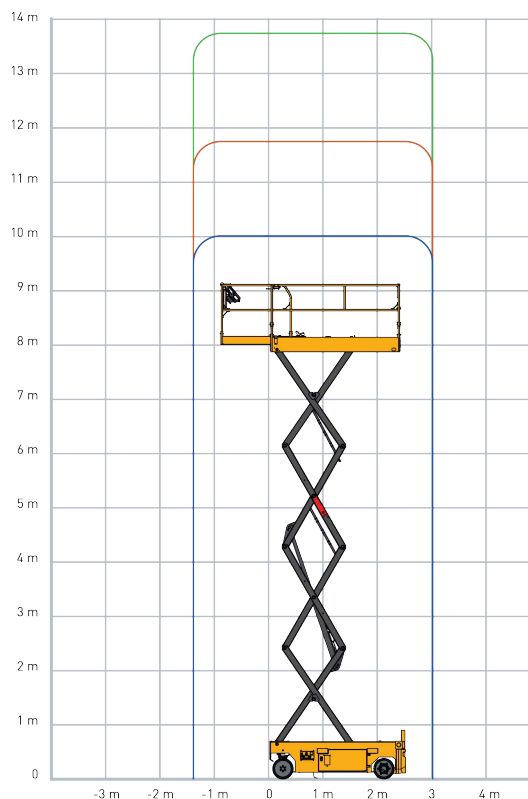

400125440 - Non contractual document - We reserve the right to modify the technical characteristics of this document without notice - 06/2024

# Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

**1.500+**

kurumsal müşteri

**CE belgeli**

kontrollü teslimat

**Türkiye geneli**

nakliye

**7/24**

saha desteği

## İLETİŞİM

**+90 216 999 95 99**

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ürün sayfası