



## MAKASLI PLATFORM

# Compact 12 / 14

Akülü Makaslı Platform

Kapsadığı modeller: Compact 12AE, Compact 14AE

**11,75 m**

Çalışma yüksekliği

**320 kg**

Kaldırma kapasitesi

**9,75 m**

Platform yüksekliği

**2.940 kg**

Ağırlık

**+90 216 999 95 99**

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ürün sayfası

## ELECTRIC SCISSOR LIFTS

WARRANTY

HAULOTTE  
**5** YEARS



**COMPACT 10**  
**COMPACT 12**  
**COMPACT 14**



### SMART RUGGED DESIGN

- > Impact-proof counterweight with integrated ladder protection, AC motors and charger plug
- > Reinforced guardrails with additional vertical stile for maximum durability

### MAXIMIZED POTENTIAL

- > Access all worksites: foldable guardrails, lateral & longitudinal forklift pockets
- > IN/OUT usage\* with full height driving and no load restriction

### UNIQUE USER EXPERIENCE

- > Proportional movements for precise driving (AC motors)
- > Ergonomic upper control box with grab handle & speed selector

### UNBEATABLE SERVICEABILITY

- > Haulotte Activ'Energy Management for battery care
- > On-board & remote settings and diagnostic tools with Haulotte Diag, Haulotte Activ'Screen and Sherpal telematics solution

\* COMPACT 14: indoor only

haulotte.com


**Haulotte**   
EQUIPMENT

**COMPACT 10**  
**COMPACT 12**  
**COMPACT 14**

## ELECTRIC SCISSOR LIFTS

### TECHNICAL DATA

|                                         | COMPACT<br>10 AE     | COMPACT<br>12 AE    | COMPACT<br>14 AE |
|-----------------------------------------|----------------------|---------------------|------------------|
| Working height                          | 10 m                 | 11.75 m             | 13.75 m          |
| Platform height                         | 8 m                  | 9.75 m              | 11.75 m          |
| Max. drive working height               | 8 m                  | 9.75 m              | 11.75 m          |
| Lift capacity - inside                  | 450 kg<br>(3 pers.)  | 320 kg<br>(3 pers.) |                  |
| Lift capacity - outside                 | 450 kg<br>(1 pers.)  | 320 kg<br>(1 pers.) | NA               |
| Lift capacity on the extension          | 120 kg               |                     |                  |
| <b>A</b> Platform length                | 2.4 m                |                     |                  |
| <b>B</b> Platform length - extended     | 3.32 m               |                     |                  |
| Length - extension                      | 0.92 m               |                     |                  |
| <b>C</b> Platform width - outside       | 1.17 m               |                     |                  |
| <b>D</b> Height - stowed                | 2.35 m               | 2.47 m              | 2.72 m           |
| Height - guardrails lowered             | 1.65 m               | 1.77 m              | 2.02 m           |
| <b>E</b> Overall width                  | 1.20 m               |                     |                  |
| <b>F</b> Length                         | 2.5 m                |                     |                  |
| <b>G</b> Wheelbase                      | 1.86 m               |                     |                  |
| <b>H</b> Ground clearance - center      | 12.5 cm              |                     |                  |
| Ground clearance -<br>deployed potholes | 2 cm                 |                     |                  |
| Drive speed                             | 0.7 / 1.5 / 4.2 km/h |                     |                  |
| Gradeability                            | 25 %                 |                     |                  |
| Tilt (longitudinal / lateral)           | 3.5° / 1.5°          |                     |                  |
| Turning radius - outside                | 1.83 m               |                     |                  |
| Non-marking tyres                       | 15 x 5               |                     |                  |
| Batteries                               | 24 V - 225 Ah (C20)  |                     |                  |
| Hydraulic system capacity               | 10 l                 | 14 l                |                  |
| Weight                                  | 2 490 kg             | 2 940 kg            | 3 070 kg         |

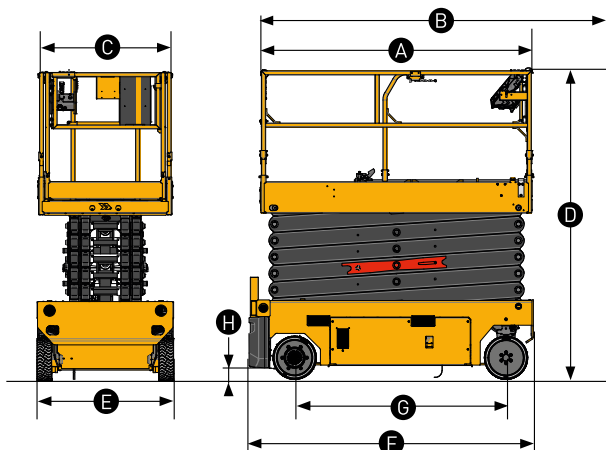


### STANDARD EQUIPMENT

- > Haulotte Activ'Energy Management: Smart CAN charger
- > 27A multivoltage charger
- > Battery access with swing out tray
- > Battery level indicator
- > Haulotte Activ'Screen (battery charge information, hourmeter, service alerts & failures in code or in text...)
- > Lateral & longitudinal forklift pockets
- > Foldable guardrails
- > Front platform extension
- > AC motors
- > Mobile upper control box
- > 2 drive speeds selector
- > Manual emergency descent
- > Mobile pothole guards
- > MyHaulotte multi-services portal access
- > 2 front steering wheels, 2 rear drive wheels
- > Solid non marking tires
- > Motion alarm
- > Electric brake release system
- > Drop bar entry

### OPTIONS AND ACCESSORIES

- > Haulotte Activ'Energy Management: automatic or manual battery water filling systems
- > AGM maintenance-free batteries
- > Secondary guarding system
- > Telematics solutions
- > Pipe cradle
- > Panel carrier
- > Swing gate entry
- > Additional protection of upper & lower control box
- > Basket plug (110 / 230 V)
- > Working light
- > Flashing light (single, dual or 360°)
- > Biodegradable hydraulic oil
- > Cold weather hydraulic oil

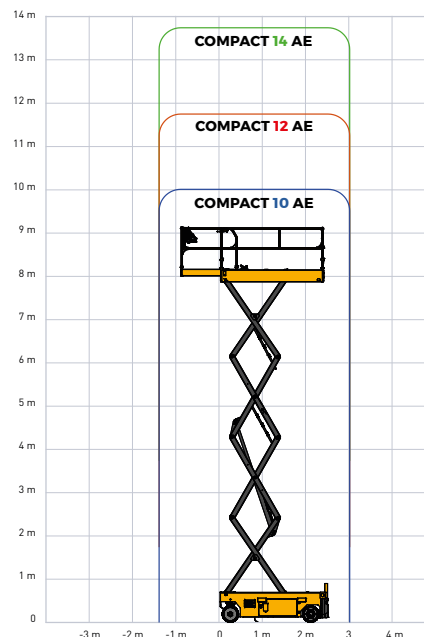

# Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

**1.500+**

kurumsal müşteri

**CE belgeli**

kontrollü teslimat

**Türkiye geneli**

nakliye

**7/24**

saha desteği

## İLETİŞİM


**+90 216 999 95 99**

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ürün sayfası