



EKLEMLİ PLATFORM

HA20 RTJ / RTJ PRO

Dizel Eklemlı Platform

Kapsadığı modeller: HA20 RTJ, HA20 RTJ PRO

20,65 m

Çalışma yüksekliği

230 kg

Kaldırma kapasitesi

13,5 m

Yatay erişim

11.710 kg

Ağırlık

+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ürün sayfası

ROUGH TERRAIN ARTICULATING BOOMS



HA20 RTJ HA20 RTJ PRO



MAXIMUM PRODUCTIVITY

- > 360° continuous rotation (PRO model only)
- > 4 wheel steering for more agility (PRO model only)

EXCELLENT ROUGH-TERRAIN CAPABILITIES

- > Climbing ramps up to 45%
- > Oscillating axle for a very good ground grip (PRO model)
- > Differential lock (hydraulic) to optimize crossing capacity

OPTIMIZED COST OF OWNERSHIP

- > Simplified hydraulic architecture thanks to mechanical axles
- > Simple and reliable engine (>19kW, does not require a particulate filter)
- > Sherpal ready for maximized usage and to generate additional revenue (optional)

OPTIMAL SAFETY


- > Haulotte Activ'Shield Bar: anti-crushing system (standard PRO model)
- > Haulotte Activ'Lighting System: load and unload the machine in low visibility conditions (standard PRO model)

HA20 RTJ HA20 RTJ PRO

ROUGH TERRAIN ARTICULATING BOOMS

TECHNICAL DATA

	HA20 RTJ	HA20 RTJ PRO
Working height	20.5 m	
Platform height	18.5 m	
Horizontal outreach	11.9 m	
Tailswing	42 cm	
A Length - stowed	8.60 m	
B Width	2.43 m	
C Storage / transport height	2.98 m	
D Wheelbase	2.5 m	
E Ground clearance - mini	30 cm	
E Ground clearance - maxi	36 cm	
F x G Platform size	1.80 x 0.8 m	
H Storage / transport length	6.16 m	
Tilt	4° - option 6°	
Platform rotation	180° (+90° / -90°)	
Turntable rotation	355° non continuous	360° continuous
Up and over clearance	8.5 m	
Height - stowed	2.47 m	
Lift capacity	250 kg (2 pers.) - option 350 kg	
Drive speed	0.5 - 5 km/h	
Maximum wind speed rating	45 km/h	
Gradeability	45 %	
Tires - solid rough terrain	910 x 355 mm	
Turning radius - outside	5,2 m	
Power source	KUBOTA, TIER 4 final : Stage V, China IV, Diesel: 18.5 kW	
Weight	9 180kg	9 430kg

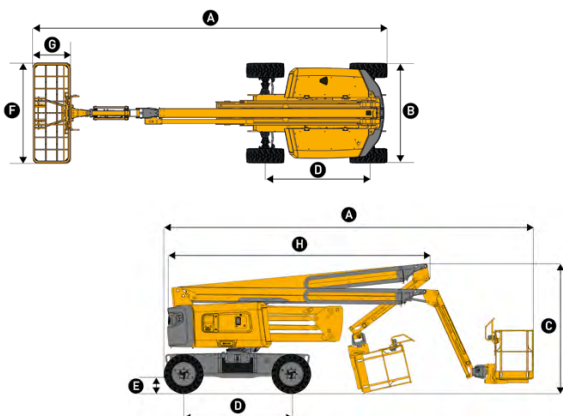


STANDARD EQUIPMENT

- > Haulotte Activ'Shield Bar (standard PRO model)
- > Haulotte Activ'Lighting System (standard PRO model)
- > Haulotte Stop Emission System
- > Haulotte Activ'Screen
- > 4 wheel drive and 4 wheel steering (standard PRO model) / 4 wheel drive and 2 wheel steering (standard RTJ model)
- > Permanent limited slip differential
- > Oscillating axle (PRO model only)
- > 360° continuous rotation (PRO model only)
- > Simultaneous and proportional movements
- > Modular standard basket
- > Swing out engine tray for ease of maintenance
- > Access to the MyHaulotte multi-service portal
- > Universal telematic plug
- > 12 V battery / electrical control system
- > Rotating beacon
- > Upper control box protection cover

OPTIONS AND ACCESSORIES

- > Haulotte Extra Reach
- > Hydraulic generator 3.5 Kw, 6Kw and 9Kw
- > USB port
- > Large basket 2.44 x 0.91 m
- > Swing door entry gate
- > Air line to platform
- > Cold weather kit
- > Glazier kit
- > Flashing light
- > Sherpal telematics subscription
- > Non-marking tires

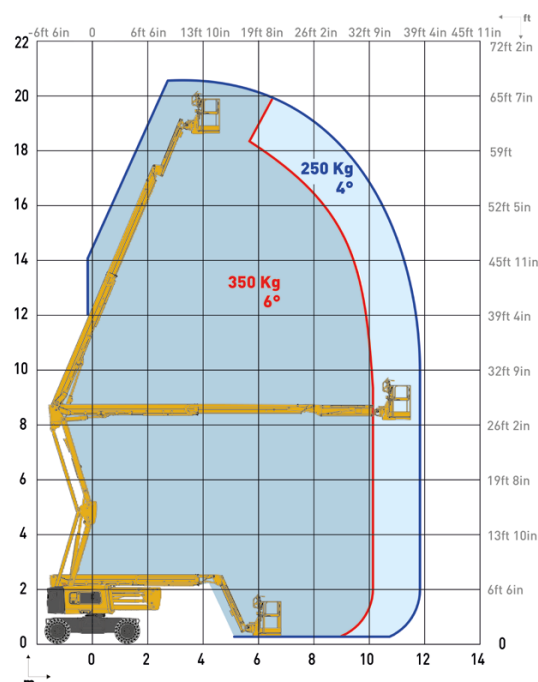

Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

1.500+

kurumsal müşteri

CE belgeli

kontrollü teslimat

Türkiye geneli

nakliye

7/24

saha desteği

İLETİŞİM

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ürün sayfası