



EKLEMLİ PLATFORM

# HA26 RTJ PRO

Dizel Eklemlı Platform

**26,4** m

Çalışma yüksekliği

**250** kg

Kaldırma kapasitesi

**17,5** m

Yatay erişim

**15.500** kg

Ağırlık

**+90 216 999 95 99**

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ürün sayfası

## ROUGH TERRAIN ARTICULATING BOOMS

# HA26 RTJ PRO



### PERFORMANCE & PRODUCTIVITY

- > Very good working envelope
- > Vertical arm rise - basket remains parallel to wall
- > Outstanding RT capabilities
- > Basket load capacity 250 kg
- > Dual load 250 - 350 kg (option)

### SAFETY AND COMFORT

- > Quick, proportional and simultaneous movements
- > Haulotte Activ'Lighting System safe load
- > Haulotte Activ'Shield Bar 2.0

### MAXIMIZED TOTAL COST OF OWNERSHIP

- > Haulotte Activ'Screen (on board diagnostic)
- > Haulotte Stop Emission System automatically turns the engine off & on
- > Easy access to all components
- > Large modular basket, quick and easy to repair



haulotte.com

**Haulotte**   
EQUIPMENT


# HA26 RTJ PRO

## ROUGH TERRAIN ARTICULATING BOOMS

### TECHNICAL DATA

#### HA26 RTJ PRO

|                                     |                                     |
|-------------------------------------|-------------------------------------|
| Working height                      | 26.4 m                              |
| Platform height                     | 24.4 m                              |
| Horizontal outreach                 | 17.5 m                              |
| Up and over clearance               | 9.3 m                               |
| Lift capacity                       | 250 kg (2 pers.) - option 350kg     |
| <b>F</b> x <b>G</b> Platform size   | 2.44 x 0.91 m                       |
| <b>A</b> Length - stowed            | 11.8 m                              |
| <b>B</b> Width                      | 2.48 m                              |
| <b>C</b> Height - stowed            | 2.97 m                              |
| <b>H</b> Storage / transport length | 9.4 m                               |
| Storage / transport height          | 2.98 m                              |
| Platform rotation                   | 180 °                               |
| Vertical jib rotation               | 133° (- 65° / + 68°)                |
| Turntable rotation                  | 360° continuous                     |
| Tailswing                           | 0.76 m                              |
| <b>D</b> Wheelbase                  | 2.8 m                               |
| Ground clearance                    | 48 cm                               |
| Tilt                                | 4 °                                 |
| Drive speed                         | 5 km/h                              |
| Maximum wind speed rating           | 45 km/h                             |
| Gradeability                        | 45 %                                |
| Turning radius - outside            | 4.35 m                              |
| Tyres - solid rough terrain         | 1025 x 365 mm                       |
| Power source                        | Kubota, 36.5 kW (49.6 hp), Stage 3A |
| Weight                              | 15 500 kg                           |

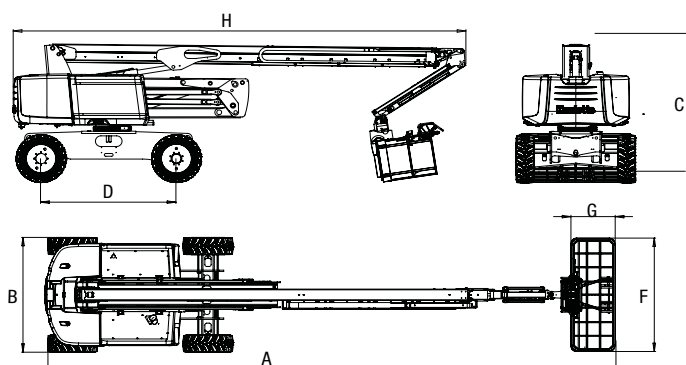


### STANDARD EQUIPMENT

- > Haulotte Activ'Screen: embedded diagnostic system on lower control box, with color screen
- > Haulotte Activ'Shield Bar 2.0
- > Haulotte Activ'Lighting System, safe load
- > Haulotte Stop Emission System: automatic engine stop system
- > Universal telematics plug
- > 4 wheel drive, 4 wheel steer
- > Front oscillating axle
- > 4 simultaneous movements
- > Automatic differential wheel lock
- > Upper control box cover
- > Tool tray
- > Large modular Haulotte basket 2.44 m x 0.91m
- > Drop bar entry gate
- > AC power to platform (110 / 230 V)
- > Swing out engine tray
- > Sound and light alarm for tilt and load
- > Rotating beacon
- > Travel alarm
- > Electric pump system and emergency descent
- > 12 V battery / electrical control system
- > Engine pre-heater with light indicator
- > Low fuel level indicator (upper control box), fuel gauge (lower control box).

### OPTIONS AND ACCESSORIES

- > Non marking tyres
- > Dual load capacity 250 / 350 kg (restricted)
- > 60 km/h wind speed
- > Power to platform (female plug in the basket)
- > Air-line to platform
- > Lateral swing door entry gate
- > Hydraulic generator 3.5 kW or 6.5 kW
- > Biodegradable hydraulic oil
- > Hydraulic oil cooler
- > Cold weather kit - 20° / Arctic weather kit - 25°C
- > Pipe cradle pack
- > Glazier pack
- > Working light
- > Battery circuit breaker

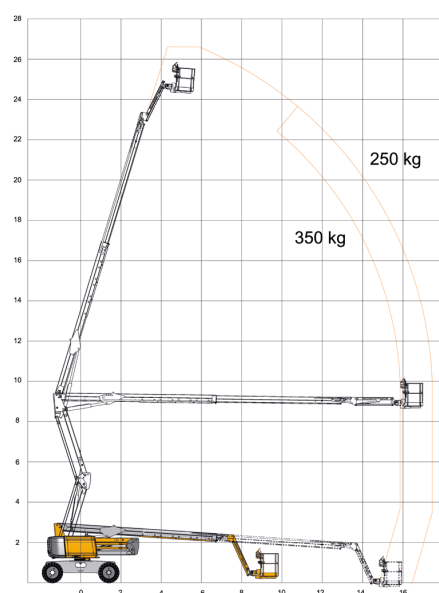

400062386.0 - Non contractual document - We reserve the right to modify the technical characteristics of this document without notice - 05/2019

# Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

**1.500+**

kurumsal müşteri

**CE belgeli**

kontrollü teslimat

**Türkiye geneli**

nakliye

**7/24**

saha desteği

## İLETİŞİM

**+90 216 999 95 99**

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ürün sayfası