



TELESKOPİK PLATFORM

HT 16 RTJ PRO

Dizel Teleskopik Platform

16,1_m

Çalışma yüksekliği

250_{kg}

Kaldırma kapasitesi

13_m

Yatay erişim

7.930_{kg}

Ağırlık

+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ürün sayfası

ROUGH TERRAIN TELESCOPIC BOOMS

HT16 RTJ PRO



GREAT PRODUCTIVITY & PERFORMANCE

- > Dual load capacity:
250 - 350 kg restricted
- > 4 wheel drive for excellent rough terrain capabilities
- > 4 wheel steer for agile maneuverability
- > Quick & simultaneous movements

MAXIMIZED TOTAL COST OF OWNERSHIP

- > Haulotte Activ'Screen :
on-board configuration & diagnostic interface
- > Easy access to components
- > Haulotte Stop Emission System reduces engine and component use
- > Reduced engine TCO (power <19 kW : no particulate filter)

OPTIMAL SAFETY

- > Haulotte Activ'Shield Bar prevents crushing risks
- > Haulotte Activ'Lighting System lightens the boom for safe loading in low visibility
- > Smooth & proportional movements for greater precision




HT16 RTJ PRO

ROUGH TERRAIN TELESCOPIC BOOMS

TECHNICAL DATA

HT16 RTJ PRO

Working height	16.1 m
Platform height	14.1 m
Horizontal outreach	13 m
Lift capacity	250kg (option: restricted 350kg)
A Length - stowed	9.16 m
B Overall width	2.29 m
C Height - stowed	2.47 m
D Wheelbase	2.35 m
E Ground clearance	33 cm
F x G Platform size	1.83m x 0.76m
H Storage / transport length	6.68 m
Storage / transport height	3.06 m
Vertical jib rotation	133° (+68° / -65°)
Turntable rotation	360° continuous
Tailswing	93 cm
Tilt	5 °
Drive speed	5.2 km/h
Gradeability	45 %
Turning radius - outside	3.6 m
Tyres - solid rough terrain	850 x 340 mm
Engine	Kubota 18.5kW (Stage 5 & NRC)
Weight	7 930kg

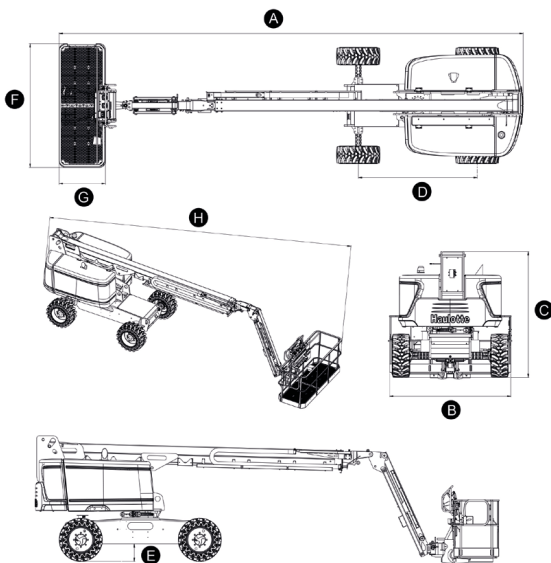


STANDARD EQUIPMENT

- > Haulotte Activ' Shield bar: anti-entrapment system
- > Haulotte Activ' Lighting System: improved visibility
- > Haulotte Activ' Screen: on-board diagnostics
- > Haulotte Stop Emission System: automatically turns the engine off & on
- > 4 wheel drive
- > 4 wheel steer
- > Oscillating axle
- > Differential : permanent limited slip & operator controlled locking rear
- > Smooth & proportional movements
- > Universal telematic plug
- > Up to 4 simultaneous movements
- > Cured-on solid tires
- > Swing out engine tray
- > Upper control box protection and tool tray
- > Sound and light alarm for tilt and load
- > Motion alarm and rotating beacon

OPTIONS AND ACCESSORIES

- > Dual load basket capacity 250 - 350kg (restricted envelope)
- > Large platform 2,44 x 0,91m
- > Swing door entry gate
- > Power to platform (plug in basket)
- > Hydraulic generators 3,5kw or 6,5kW
- > Glazier pack
- > Pipe rack kit
- > Air-line to platform
- > Dual USB plug in basket
- > Non-marking tires
- > Hydraulic oil cooler
- > Cold weather package

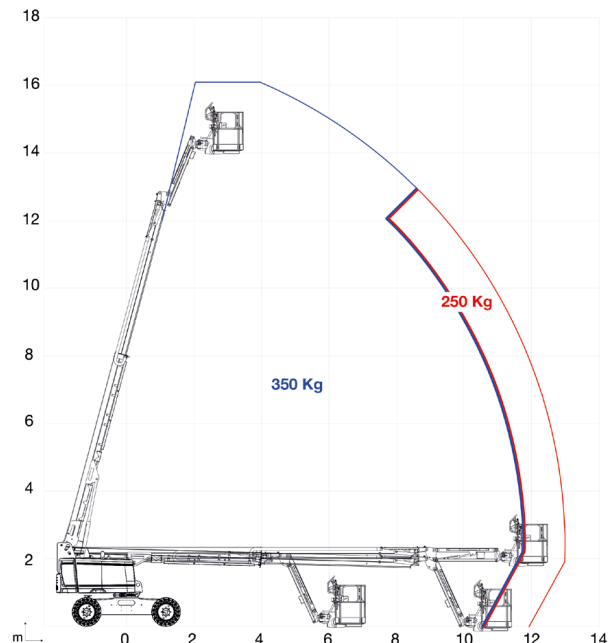

400107-6090 - Non contractual document - We reserve the right to modify the technical characteristics of this document without notice - 12/2020

Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

1.500+

kurumsal müşteri

CE belgeli

kontrollü teslimat

Türkiye geneli

nakliye

7/24

saha desteği

İLETİŞİM


+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ürün sayfası