



ARTICULATED BOOM LIFT

# HA32 RTJ PRO

Diesel Articulated Boom Lift

**31.8 m**

Working height

**250 kg**

Platform capacity

**21.3 m**

Horizontal outreach

**20,100 kg**

Weight

**+90 216 999 95 99**

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Product page

## ROUGH TERRAIN ARTICULATING BOOMS

# HA32 RTJ PRO



### PERFORMANCE & EASE OF USE

- > Unrestricted working envelope with a max. 21.60 m horizontal outreach
- > Unmatched versatility
- > Outstanding rough terrain driving features: 4 wheel drive and steer, oscillating axle
- > Excellent time to full height of 95 sec. thanks to fully proportional controls and simultaneous boom functions

### OPTIMIZED MAINTENANCE

- > Exclusive modular basket quick and easy to repair
- > Easy access to all components
- > Self-diagnosis tool integrated on the lower control box

### BEST SAFETY FEELING

- > Haulotte Activ'Shield Bar 2.0
- > Most rigid boom




# HA32 RTJ PRO

## ROUGH TERRAIN ARTICULATING BOOMS

### TECHNICAL DATA

#### HA32 RTJ PRO

|                                        |                                                                                    |
|----------------------------------------|------------------------------------------------------------------------------------|
| Working height                         | 31.8 m                                                                             |
| Platform height                        | 29.8 m                                                                             |
| Horizontal outreach                    | 21.6 m                                                                             |
| Up and over clearance                  | 11.35 m                                                                            |
| Below ground reach                     | 5.5 m                                                                              |
| Lift capacity                          | 250 kg (2 pers.)                                                                   |
| <b>F</b> x <b>G</b> Platform size      | 2.44 x 0.91 m                                                                      |
| <b>A</b> Length - stowed               | 11.7 m                                                                             |
| <b>B</b> Width                         | 2.53 m                                                                             |
| <b>H</b> Storage / transport length    | 8.9 m                                                                              |
| Storage / transport height             | 3.75 m                                                                             |
| Width - with extended axles            | 3.3 m                                                                              |
| <b>C</b> Height - stowed               | 2.8 m                                                                              |
| Vertical jib rotation                  | 140° (+ 70 / - 70)                                                                 |
| Platform rotation                      | 180° (+ 90 / - 90)                                                                 |
| Turntable rotation                     | 360° continuous                                                                    |
| Tailswing                              | 3.3 m                                                                              |
| <b>D</b> Wheelbase                     | 3.5 m                                                                              |
| <b>E</b> Ground clearance              | 38 cm                                                                              |
| Tilt                                   | 5 °                                                                                |
| Drive speed                            | 0.5 - 5 km/h                                                                       |
| Maximum wind speed rating              | 60 km/h                                                                            |
| Gradeability                           | 40 %                                                                               |
| Tyres - foam-filled                    | 445 / 65-22.5                                                                      |
| Turning radius - outside axle extended | 5.74 m                                                                             |
| Power source                           | Deutz, 55 kW, Turbo (Stage 5 in EU) ;<br>Perkins, 62.5 kW, Turbo (Stage 3A in NRC) |
| Weight                                 | 20 100 kg                                                                          |

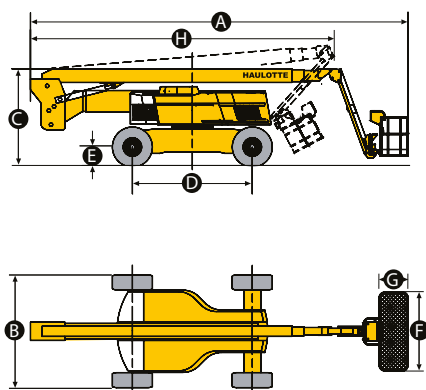


### STANDARD EQUIPMENT

- > Haulotte Activ'Shield Bar 2.0
- > Universal telematics plug
- > 4 wheel drive and steer
- > Front oscillating axle increasing stability on uneven ground
- > 2 extendable axles
- > Proportional controls enhancing comfort and safety
- > 4 simultaneous movements for highest productivity
- > Differential wheel lock increasing rough terrain capacity
- > Upper control box protection cover and tool tray in plastic ultra-solid material
- > Modular large platform with drop bar entry gate
- > Power to platform 110 V / 220 V (Female plug in the basket)
- > Basket compensation  $\pm 10^\circ$
- > Enhanced Swing out engine tray for ease of maintenance
- > Sound and light alarm for tilt and load
- > Driving beacon
- > Travel alarm
- > Hourmeter
- > Electric pump system and emergency descent
- > 12 V battery / electrical control system
- > Engine pre-heater with light indicator
- > Low fuel level indicator (upper control box)
- > Towing hooks

### OPTIONS AND ACCESSORIES

- > Air line to platform
- > Lateral swing door gate
- > On-board hydraulic generator 3.5 kW
- > Biodegradable hydraulic oil
- > Hydraulic oil cooler
- > Hydraulic oil in tank and circuit for warm countries
- > Cap with key for diesel tank
- > Cold weather kit
- > Pipe cradle pack
- > Glazier Pack
- > Automatic Overspeed Air Shutdown Valve (electric one-way valve, flame arrestor, spark arrestor)
- > 55 W Platform working light

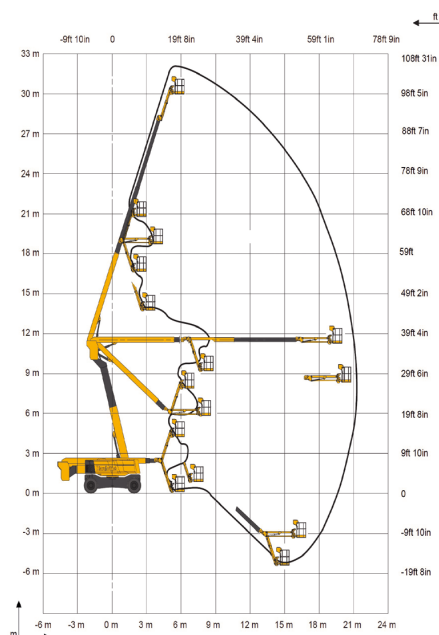

# At height, you're safe with us

A large hire fleet of scissor, articulated, telescopic, vertical mast, trailer-mounted, tracked and truck-mounted platforms, delivered fully documented and well maintained. Let us help you choose the right machine.

- ✓ Free site survey and machine selection
- ✓ Periodic inspection and CE paperwork
- ✓ Operator training
- ✓ Transport and delivery across Türkiye
- ✓ Maintenance and on-site service throughout the hire
- ✓ 24/7 on-site support line

**1,500+**

corporate clients

**CE-marked**

inspected delivery

**Across Türkiye**

transport

**24/7**

on-site support

## CONTACT

**+90 216 999 95 99**

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Product page