

**SCISSOR LIFT**

# HS15 E / HS18 E

Electric Scissor Lift

Models covered: HS15 E, HS18 E

**15** m

Working height

**750** kg

Platform capacity

**13** m

Platform height

**7,480** kg

Weight

**+90 216 999 95 99**

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Product page

## ELECTRIC ROUGH TERRAIN SCISSOR LIFT

**PULSEO**  
GENERATION

### HS15 E / HS18 E



#### HIGH PERFORMANCE & ROUGH TERRAIN CAPACITIES

- > Platform capacity of 750 kg
- > Drive axle with manual locking rear differential increases ground traction

#### FULL ELECTRIC DRIVE

- > Silent & clean operations
- > Versatile use: outdoor / indoor
- > Smooth & proportional movements

#### MAINTENANCE AND SERVICE-ORIENTED

- > Activ'Screen: on-board configuration & diagnostic interface
- > Easy access to components
- > Haulotte Activ'Energy Management takes care of your battery

#### EXTENDED DUTY CYCLES

- > Multiple charging modes including optional accelerated charge
- > Optional & removable, low fuel consumption Range Extender (Stage 5)

haulotte.com

**Haulotte**  
EQUIPMENT


# HS15 E / HS18 E

## ELECTRIC ROUGHT TERRAIN SCISSOR LIFT

### TECHNICAL DATA

|                                        | HS15 E                 | HS18 E   |
|----------------------------------------|------------------------|----------|
| Working height                         | 15 m                   | 18 m     |
| Platform height                        | 13 m                   | 16 m     |
| Max. drive working height              | 15 m                   | 13 m     |
| Lift capacity                          | 750 kg (4 pers.)       |          |
| Lift capacity on the extension         | 225 kg                 |          |
| <b>A</b> Platform length               | 3.93 m                 |          |
| Platform length - extended             | 4.9 m                  |          |
| <b>B</b> XL platform length (option)   | 4.94 m                 |          |
| XL platform length - extended (option) | 7.5 m                  |          |
| Length - extension                     | 0.98 m                 |          |
| Length - extension XL option           | 1.28 m                 |          |
| <b>C</b> Platform width - outside      | 1.89 m                 |          |
| <b>D</b> Height - stowed               | 3.05 m                 | 3.15 m   |
| Height - guardrails lowered            | 2.25 m                 | 2.36 m   |
| <b>E</b> Overall width                 | 2.3 m                  |          |
| <b>F</b> Length                        | 4.4 m                  |          |
| <b>G</b> Wheelbase                     | 2.76 m                 |          |
| <b>H</b> Ground clearance              | 30.7 cm                |          |
| Drive speed                            | 5 km/h                 |          |
| Gradeability                           | 45 %                   | 40 %     |
| Tilt (longitudinal / lateral)          | 5° / 3°                | 5° / 2°  |
| Turning radius - outside               | 6.75 m                 |          |
| Tyres                                  | 830 x 285 mm           |          |
| Batteries                              | 8 x 6 V - 435 Ah (C20) |          |
| Weight                                 | 7 518 kg               | 8 048 kg |

Certain options increase the machine weight

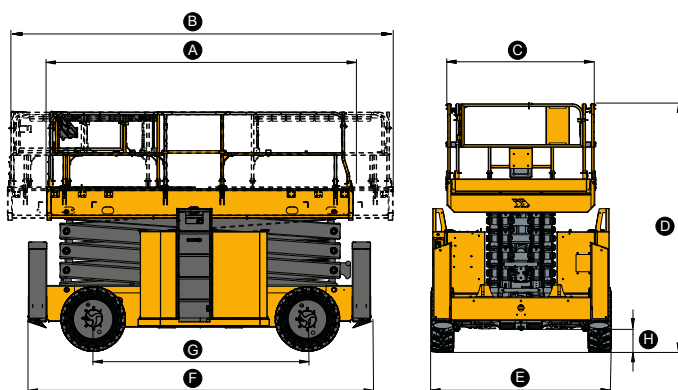


### STANDARD EQUIPMENT

- > 4 wheel drive
- > Folding handrails
- > Mechanical axle with manual locking rear differential
- > Outriggers with centralized or individual controls
- > One platform extension
- > Two drop bar entries
- > Haulotte Activ'Energy Management: smart battery management system & manual centralized watering
- > AC motors
- > 48V battery pack
- > Haulotte Activ'Screen

### OPTIONS AND ACCESSORIES

- > Haulotte Activ'Shield Bar
- > Double swing gate entries
- > Standard platform with dual extensions (5.89 m)
- > XL platform with dual extensions (7.5 m)
- > Range Extender (5.5 kW - Stage 5)
- > Accelerated charger (380 V)
- > Automatic battery water-filling system
- > Cold & arctic weather kits
- > Non marking tires
- > Material handling rack
- > AC power to platform plug (110 / 230 V)
- > Scissors stack protection
- > Platform lighting
- > Work light
- > Telematics holder & predisposition
- > Telematics solutions

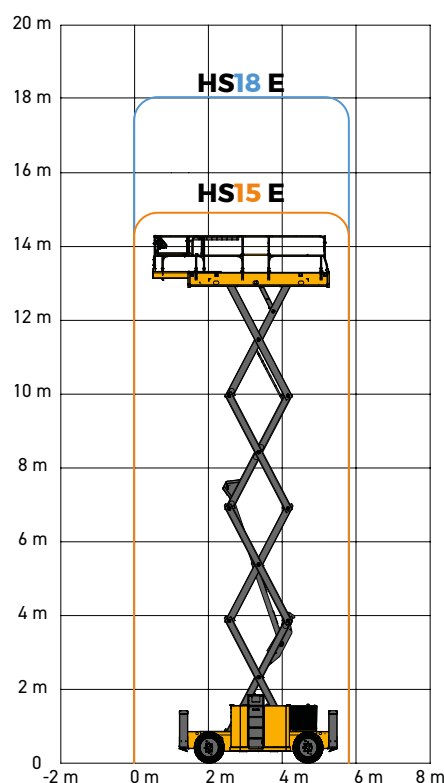

4001117750 - We reserve the right to modify the technical characteristics of this document without notice - 04/2023

# At height, you're safe with us

A large hire fleet of scissor, articulated, telescopic, vertical mast, trailer-mounted, tracked and truck-mounted platforms, delivered fully documented and well maintained. Let us help you choose the right machine.

- ✓ Free site survey and machine selection
- ✓ Periodic inspection and CE paperwork
- ✓ Operator training
- ✓ Transport and delivery across Türkiye
- ✓ Maintenance and on-site service throughout the hire
- ✓ 24/7 on-site support line

**1,500+**

corporate clients

**CE-marked**

inspected delivery

**Across Türkiye**

transport

**24/7**

on-site support

## CONTACT

**+90 216 999 95 99**

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Product page