

ARTICULATED BOOM LIFT

AR11J(AR35J)

Diesel Articulated Boom Lift

MANUFACTURER · LGMG

+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul




Ask on WhatsApp

LGMG

AR11J

ARTICULATING BOOM LIFT

- 270kg large platform capacity design maximises productivity.
- Motion squawker, dual pole battery and starter isolators as standard.
- Powerful axle-integrated four-wheel drive system.
- Full-time floating axle significantly improves rough terrain capability and ground clearance.
- Advanced proportional electronic control system for easy diagnostics as well as accurate positioning and smooth operation.

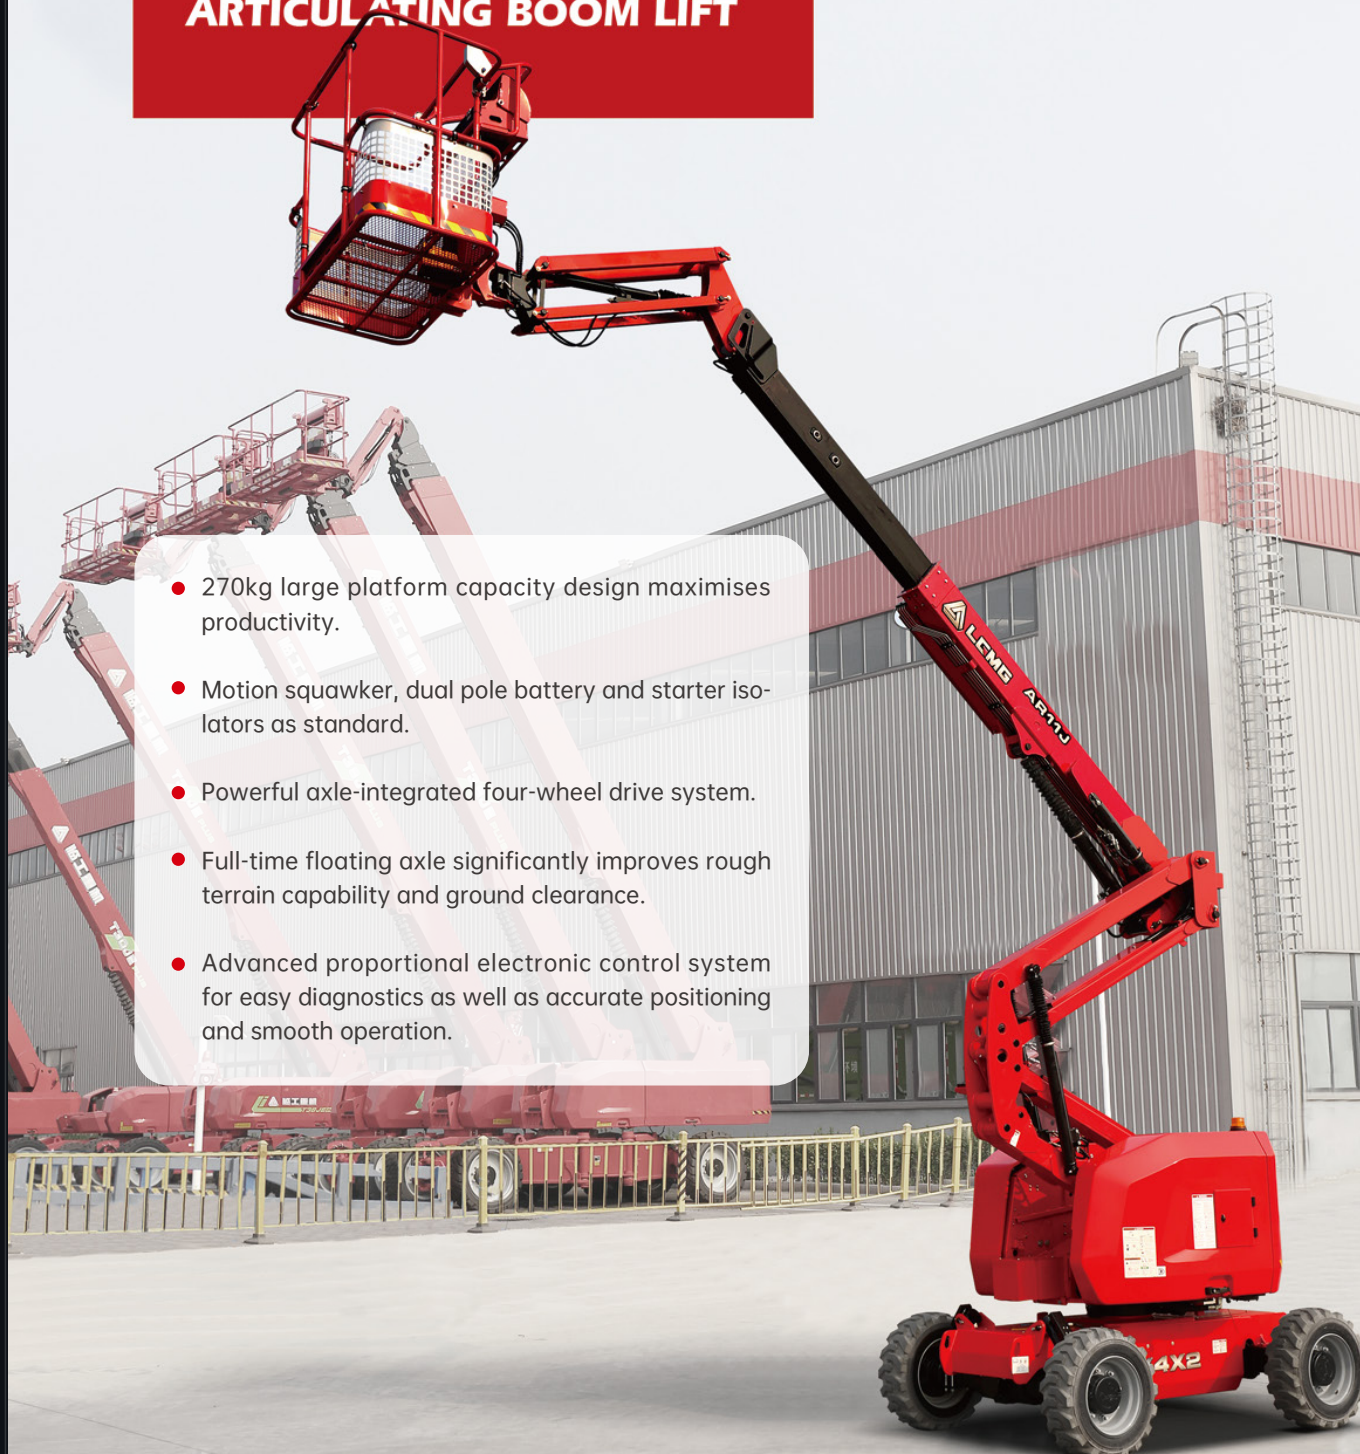

LGMG Diesel - Articulating Boom Lift

SPECIFICATIONS

MODELS	AR11J
Measurements	Metric
Work Height Max.	12.75m
Platform Height Max.	10.75m
Horizontal Outreach	6.78m
Up and Over Height	5.32m
Platform Length	1.42m
Platform Width	0.76m
Ⓐ Stowed Length	5.77m
Length-Transport (jib tucked)	4.46m
Ⓑ Overall Width	1.85m
Ⓒ Stowed Height	2.06m
Height-Transport	2.29m
Ⓓ Wheelbase	1.88m
Ⓔ Ground Clearance	0.19m

PRODUCTIVITY

Max. Platform Occupancy	2
Platform Capacity	270kg
Turntable Rotation	355°
Drive Speed-Stowed	5km/h
Drive Speed-Raised	0.8km/h
Gradeability	45%
Max. Wind Speed	12.5m/s
Turning Radius-Inside	2.6m
Turning Radius-Outside	4.7m
Max.Slope	3°/4.5°
Tires Type	Foam-filled non-marking
Tires Models	10-16.5

POWER

Power Source	Kubota D1105 18.2kW
Fuel Tank Capacity	40L

HYDRAULIC SYSTEM

Hydraulic Oil Volume	58L
----------------------	-----

WEIGHT



Machine Weight	5,400kg
----------------	---------

STANDARD FEATURES


Proportional control	Foam-filled non-marking tires
Horn/Hour meter	Platform control cover
Emergency stop device	Overload sensing system
Auto-leveling platform	Intelligent diagnostic system
Anti-collision protection	Oscillating axle
Full-height drive	Telematics connector
Flashing beacons	Over tilt protection system
Cylinder bellows	Battery isolator switch (double pole)
Squawker alarm	Start motor isolator switch (double pole)
Half-height mesh platform	

OPTIONAL

AC power to platform	RT Foam-filled tires
Telematics	Solid tires
Auxiliary rail	Solid non-marking tires
Platform tool box	Biodegradable hydraulic oil

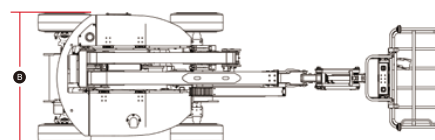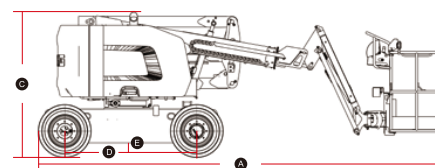

AR11J Working Range

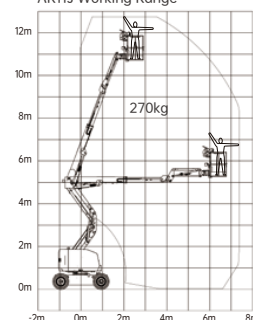

Please contact LGMG or a local dealer for more details.
LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.
This model is only available for the Australian market.

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China
Email: sales@lgmg.com.cn Tel: +86 531 6787 9283

LGMG Machinery Australia Pty Ltd

Address: 27 Broadhurst Road, Ingleburn, NSW 2565
Email: kevan.jarvis@lgmg.com.cn Tel: +61 499 685 544

www.lgmglifts.com



RELIABILITY IN ACTION

At height, you're safe with us

A large hire fleet of scissor, articulated, telescopic, vertical mast, trailer-mounted, tracked and truck-mounted platforms, delivered fully documented and well maintained. Let us help you choose the right machine.

- ✓ Free site survey and machine selection
- ✓ Periodic inspection and CE paperwork
- ✓ Operator training
- ✓ Transport and delivery across Türkiye
- ✓ Maintenance and on-site service throughout the hire
- ✓ 24/7 on-site support line

1,500+

corporate clients

CE-marked

inspected delivery

Across Türkiye

transport

24/7

on-site support

CONTACT

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ask on WhatsApp