

SCISSOR LIFT

0607EN

Electric Scissor Lift

MANUFACTURER · SINOBOOM



+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ask on WhatsApp

ELECTRIC SCISSOR LIFTS - ELECTRIC DRIVE

0607EN (1930EN)

Compliant with AS 1418 · 10 standards

PRODUCT HIGHLIGHTS

Reliable Quality

- The scissor stack is strengthened and widened, with 50% increase in width, making for more stable lifting and lowering at height
- Upgraded large tires, strong power, waterproof and moisture-proof

Flexible Operation

- Compact overall design, light weight, large load capacity, flexible movement, can enter and travel in elevators
- Under 2m total height, and able to pass through standard doorways without folding the guardrails

Convenient Maintenance

- Modular design, high versatility of parts
- Widescreen HMI display for intelligent and efficient fault diagnosis and troubleshooting



Standard Features		
2WD×2WS	AGM maintenance-free battery	Telematic ready
Non-marking tires	Proportional control	Battery isolator
Emergency stop	Forklift pockets and lifting points	Secondary guarding system
Flashing beacon	Automatic pothole protection	White noise alarm
Foldable guardrail	Bumper rails	DC drive motor
Drivable at full height	Weight management system	Fault diagnosis system
Manual storage box		
Options & Accessories		
Wheel nut indicators	Panel lifting system	Telematic device
Fire extinguisher/Bracket	Mine spec	AC power to platform
Pipe lifting system		

SINOBOOM™

PARTNERS IN ACCESS™

🌐 **SINOBOOM.AU** | 📞 **03 8905 1550**




HO: BRISBANE – 39 ALTA ROAD, CABOOLTURE QLD 4510 | SYDNEY – 1/3 VOYAGER CT, GLENDENNING NSW 2761
MELBOURNE – 32-34 MARNI, DANDENONG SOUTH VIC 3175

ELECTRIC SCISSOR LIFTS - ELECTRIC DRIVE

0607EN (1930EN)

Compliant with AS 1418 · 10 standards

Model	0607EN (1930EN)
Dimensions	
Max Working Height (Indoor/Outdoor)	7.55 m (24'9.2") / 6.6 m (21'7.8")
A Max Platform Height (Indoor/Outdoor)	5.55 m (18'2.5") / 4.6 m (15'1.1")
B Platform Extension	0.6 m (2')
C Machine Length	1.58 m (5'2.2")
D Machine Width	0.78 m (2'6.7")
E Machine Height (Rails Folded)	1.63 m (5'4.2")
E Machine Height (Rails Unfolded)	1.99 m (6'6.3")
F Wheelbase	1.14 m (3'8.9")
G Axle-base (Rails Unfolded)	0.7 m (2'3.6")
Ground Clearance (Pothole Guard Stowed)	0.061 m (2.4")
Ground Clearance (Pothole Guard Deployed)	0.02 m (0.75")
Platform Size (L×W×H)	1.41 m×0.76 m×1.1 m (4'7.5"×2'5.9"×3'7.3")
Performance	
Platform Capacity	230 kg (507 lbs)
Extension Platform Capacity	120 kg (265 lbs)
Max Platform Occupants (Indoor/Outdoor)	2 Persons/1 Person
Drive Speed (Stowed)	0 ~ 4.0 km/h (0 ~ 2.49 mph)
Drive Speed (Raised)	0 ~ 0.5 km/h (0 ~ 0.31 mph)
Lift Time (Rated Load)	24 s~28 s
Lower Time (Rated Load)	26 s~30 s
Gradeability (2WD)	25%
Max Allowable Inclination (front-to-back/side-to-side)	3° /1.5°
Turning Radius (Inside/Outside)	0.1 m/1.48 m(3.9"/4'10.3")
Max Allowable Side Force (Inside/Outside)	400 N/ 200 N (90 lbf/45 lbf)
Max Allowable Wind Speed(Indoor/Outdoor)	0/12.5 m/s (0/28 mph)
Tire Spec/Type	280×76 mm/solid (11"×3")
Power	
Drive×Steer	2 WD×2 WS
Power Source (V/kW)	24 V DC, 2.2 kW
Hydraulic Tank Capacity	4 L (0.9 gal (UK)/1.05 gal (US))
Batteries	24 V, 120 Ah, 20 hr (AGM)
System Voltage / Control Voltage	24 VDC / 24 VDC
Charger (Input/Output)	100 ~ 240 V AC/15A
Drive Motor (Voltage/Power)	24 VDC/0.4 kW
Weight	
Weight (Indoor/Outdoor)	1,100 kg (2,425 lbs)
Standards Compliance	AS 1418 · 10

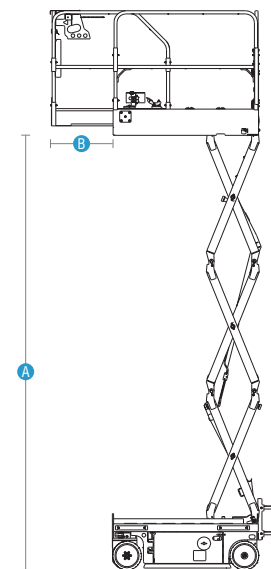

This document is provided for information purposes only and reflects product information available at the time of publication. Sinoboom Intelligent Equipment Pty Ltd reserves the right to change specifications, designs, and equipment without notice and makes no representations or warranties. Where indicated, AS-marked platforms conform to AS/NZS 1418.10:2011. Refer to the applicable Sinoboom Operating, Maintenance, and Parts Manuals for correct use and procedures. 03.2026

At height, you're safe with us

A large hire fleet of scissor, articulated, telescopic, vertical mast, trailer-mounted, tracked and truck-mounted platforms, delivered fully documented and well maintained. Let us help you choose the right machine.

- ✓ Free site survey and machine selection
- ✓ Periodic inspection and CE paperwork
- ✓ Operator training
- ✓ Transport and delivery across Türkiye
- ✓ Maintenance and on-site service throughout the hire
- ✓ 24/7 on-site support line

1,500+

corporate clients

CE-marked

inspected delivery

Across Türkiye

transport

24/7

on-site support

CONTACT

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ask on WhatsApp