

SCISSOR LIFT

0608ME / 0608SE

Electric Scissor Lift

MANUFACTURER · SINOBOOM

Models covered: 0608ME, 0608SE



+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ask on WhatsApp

ELECTRIC SCISSOR LIFTS - ELECTRIC DRIVE

0608SE (1930SE)/0608ME (1932ME)

Compliant with CE/ANSI/CSA/EAC/AS/KCS standards

PRODUCT HIGHLIGHTS

Efficient and Environmentally Friendly

- Higher work efficiency
- Environmental protection, zero emissions

Reduced Maintenance Costs

- Rapid, convenient transportation with two-way forklift slot
- Lower cost of ownership with highly versatile parts

Reliable Performance

- Bumper rail protection



Standard Features		
2WD×2WS	Maintenance-free battery	Fault diagnosis system
Non-marking tires	Proportional control	Forklift pocket and lifting eyes
Emergency stop	Electrophoretic painting	Tilt protection system
Flashing beacon	Forklift pockets and lifting points	Overload sensing system
Foldable guardrail	Automatic pothole protection	Manual storage box
Drivable at full height	Bumper rails	Auto braking system
Horn & buzzer		
Options & Accessories		
RCBO	AC power to platform	Platform work light
Footswitch	Overhead anti-collision device	Telematics-ready connector
AC drive motor		



PARTNERS IN ACCESS™

SINOBOOM.COM | SALES@SINOBOOM.COM




NO.128 EAST JINZHOU AV., NINGXIANG HI-TECH INDUSTRY PARK, CHANGSHA, HUNAN, CHINA, 410600

ELECTRIC SCISSOR LIFTS - ELECTRIC DRIVE

0608SE (1930SE)/0608ME (1932ME)

Compliant with CE/ANSI/CSA/EAC/AS/KCS standards

Model	0608SE (1930SE)	0608ME (1932ME)
Dimensions		
Max Working Height (Indoor/Outdoor)	7.8 m (25'7")	7.8 m (25'7")
A Max Platform Height (Indoor/Outdoor)	5.8 m (19')	5.8 m (19')
B Max Horizontal Extension	0.9 m (3')	0.9 m (3')
C Length-Stowed	1.8 m (5'11")	1.8 m (5'11")
D Width-Stowed	0.79 m (2'7.1")	0.81 m (2'8")
E Height-Stowed (Rail Folded)	1.88 m (6'2")	1.88 m (6'2")
E Height-Stowed (Rail Unfolded)	2.14 m (7')	2.14 m (7')
F Wheelbase	1.334 m (4'4")	1.334 m (4'4")
Ground Clearance (Pothole Guard Stowed)	0.075 m (3")	0.075 m (3")
Ground Clearance (Pothole Guard Deployed)	0.019 m (0.75")	0.019 m (0.75")
Platform Dimensions (L×W×H)	1.64 m × 0.76 m × 1.1 m (5'4.6" × 2'6" × 3'7")	1.64 m × 0.76 m × 1.1 m (5'4.6" × 2'6" × 3'7")
Performance		
Platform Capacity	230 kg (507 lbs)	230 kg (507 lbs)
Extension Platform Capacity	120 kg (265 lbs)	120 kg (265 lbs)
Platform Occupants (Indoor/Outdoor)	2 persons (Indoor Only)	2 persons/1 person
Drive Speed (Stowed)	0~4 km/h (0~2.5 mph)	0~4 km/h (0~2.5 mph)
Drive Speed (Raised)	0~0.5 km/h (0~0.31 mph)	0~0.5 km/h (0~0.31 mph)
Lift Time (Unloaded)	15 s~20 s	15 s~20 s
Lower Time (Unloaded)	25 s~30 s	25 s~30 s
Gradeability	25%	25%
Max Allowable Inclination (front-to-back/side-to-side)	3° /1.5°	3° /1.5°
Turning Radius (Inside/Outside)	0/1.49 m (0/4'10.7")	0/1.49 m (0/4'10.7")
Tyre Size/Type	323×100 mm (12.7×4")/solid	323×100 mm (12.7×4")/solid
Power		
Drive×Steer	2 WD×2 WS	2 WD×2 WS
Power Source (V/kW)	24 V/2.2 kW	24 V/2.2 kW
Drive Motor (V/kW)	24 V DC/0.6 kW 24 V AC/0.6 kW	24 V DC/0.6 kW 24 V AC/0.6 kW
Hydraulic Tank Capacity	6 L (1.3 gal (UK)/ 1.6 gal (US))	6 L (1.3 gal (UK)/ 1.6 gal (US))
Batteries	24 V,170 Ah,3 hr (Lead-acid battery) 24 V,220 Ah,20 hr (Lead-acid battery) 25.6 V,156 Ah,1 hr (Lithium battery)	
Charger (Input/Output)	100~240 V AC/30 A	100~240V AC/30 A
Weight		
Weight (Indoor/Outdoor)	1,575 kg (3,473 lbs)(Indoor Only)	1,575 kg (3,473 lbs)
Standards Compliance	CE/ANSI/CSA/EAC	CE/ANSI/CSA/EAC/KCS

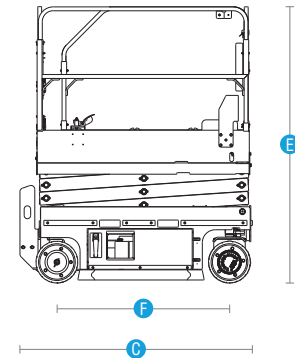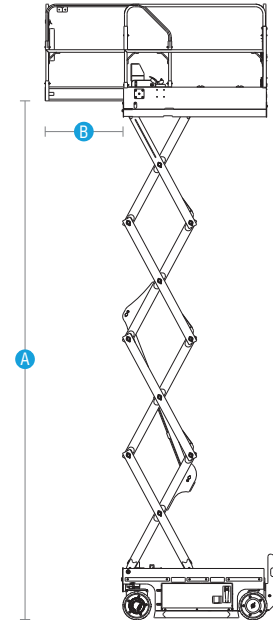

We reserve the right to make specification. The above represents the current specifications at time of publications. 09. 2025

At height, you're safe with us

A large hire fleet of scissor, articulated, telescopic, vertical mast, trailer-mounted, tracked and truck-mounted platforms, delivered fully documented and well maintained. Let us help you choose the right machine.

- ✓ Free site survey and machine selection
- ✓ Periodic inspection and CE paperwork
- ✓ Operator training
- ✓ Transport and delivery across Türkiye
- ✓ Maintenance and on-site service throughout the hire
- ✓ 24/7 on-site support line

1,500+

corporate clients

CE-marked

inspected delivery

Across Türkiye

transport

24/7

on-site support

CONTACT

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ask on WhatsApp