

MAKASLI PLATFORM

0407ET (1530ET)

Akülü makaslı platform

ÜRETİCİ · SİNOBOOM



+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor

ELECTRIC POWERED CRAWLER SCISSOR LIFTS

0407ET (1530ET)

Compliant with CE standards

PRODUCT HIGHLIGHTS

Environmentally Friendly by Hydraulic Oil-Free Design

- This machine is designed without a hydraulic system, making it ideal for use in stringent environments where no pollution and no hydraulic oil leakage are required

Easy Maintenance

- The AC drive motor features a high protection degree and requires no maintenance, ensuring the best TCO
- A pull-out battery tray and fully open chassis provide easy access to components, simplifying maintenance and reducing downtime

Easy Lifting and Transport

- This machine can be easily lifted with a single lifting point and conveniently transported using side forklift pockets on the chassis.

Best Productivity

- Non-marking rubber tracks adapt to all terrains and working conditions
- A zero turning radius spin turn makes it ideal for working in confined spaces
- The larger platform capacity of 230 kg leads the industry in its class



Standard Features		
Manual storage box	Maintenance-free battery	Weighing system
Non-marking rubber tracks	Auto braking system	Emergency lowering system
Emergency stop	Fault diagnosis system	Tilt protection system
Warning light	Forklift pockets and lifting points	Electrophoretic painting
Buzzer		
Options & Accessories		
RCBO	Charging transfer wire	Platform work light
Foot switch	Overhead anti-collision device	AC power device on platform
GPS	Single-point lifting	

SINOBOOM™




PARTNERS IN ACCESS™

SINOBOOM.COM | SALES@SINOBOOM.COM

NO.128 EAST JINZHOU AV., NINGXIANG HI-TECH INDUSTRY PARK, CHANGSHA, HUNAN, CHINA, 410600

ELECTRIC POWERED CRAWLER SCISSOR LIFTS
0407ET (1530ET)
Compliant with CE standards

Model	0407ET (1530ET)
Dimensions	
Max Working Height (Indoor/Outdoor)	6.5 m/4.9 m (21'3.9"/16'0.91")
A Max Platform Height (Indoor/Outdoor)	4.5 m/2.9 m (14'9.2"/9'6.17")
B Platform Extension	0.6 m (1'11.6")
C Machine Length (Ladder Unfolded)	1.56 m (5'1.4")
C Machine Length (Ladder Folded)	1.45 m (4'9.1")
D Machine Width	0.79 m (2'7.1")
E Machine Height (1.1 m platform height)	2 m (6'6.7")
E Machine Height (1 m platform height)	1.9 m (6'2.8")
F Wheelbase	1.14 m (3'8.9")
Axle-base	0.64 m (2'1.2")
Platform Size (L×W×H)	1.34 m×0.7 m×1.1 m (4'4.8"×2'3.6"×3'7")
Performance	
Platform Capacity	230 kg (507 lbs)
Extension Platform Capacity	115 kg (253.5 lbs)
Max Platform Occupants (Indoor/Outdoor)	1 person /1 person
Drive Speed	0~3 km/h (0~1.86 mph)
Lift Time (Unloaded)	30 s~33 s
Lower Time (Unloaded)	25 s~30 s
Gradeability (2WD)	30%
Max Allowable Inclination(Front-to-back/Side-to-side)	3°/2°
Max Allowable Side Force	200 N
Max Allowable Wind Speed (Indoor/Outdoor)	0/12.5 m/s (0/28 mph)
Power	
Batteries (Lead-acid battery)	24 V,120 Ah,20 hr
System Voltage	24 VDC
Control Voltage	24 VDC
Charger (Input/Output)	100~240 V AC/15 A
Drive Motor (Voltage/Power) (AC)	24 V AC/1 kW
Weight	
Weight (Indoor/Outdoor)	820 kg (1,808 lbs)
Standards Compliance	CE

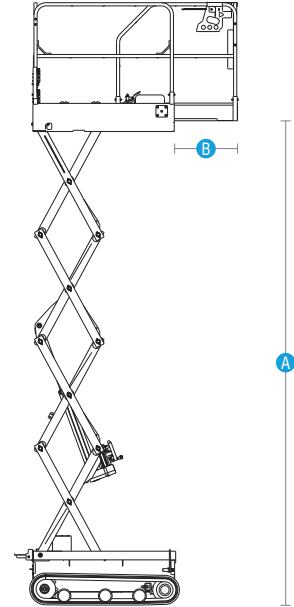

We reserve the right to make specification. The above represents the current specifications at time of publications.04. 2026

Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

1.500+

kurumsal müşteri

CE belgeli

kontrollü teslimat

Türkiye geneli

nakliye

7/24

saha desteği

İLETİŞİM

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor