


MAKASLI PLATFORM

1018RD (3369RD) 1218RD (4069RD)

Dizel makaslı platform

ÜRETİCİ · SINOBOOM

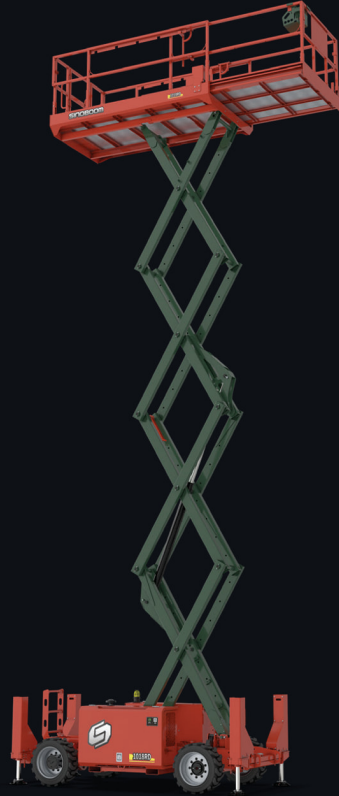

+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor

ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS

1018RD (3369RD) / 1218RD (4069RD)

Compliant with CE/ANSI/CSA/EAC/AS standards

PRODUCT HIGHLIGHTS

Excellent Performance

- Up to 35% gradeability, easily handling outdoor needs
- Stable movement, oscillating working at both stowed and raised position

High Efficiency

- 1.6m(5'3") wide platform with one-way extension platform
- One-click leveling, easy work on uneven road surfaces

Easy Maintenance

- Two-sided hatchback door design, for convenient maintenance
- Swing-out engine compartment for easy maintenance



Standard Features		
4 WD × 2 WS	Forklift pockets and lifting points	Proportional control
Manual storage box	Flashing beacon	Emergency lowering system
Emergency stop	Electrophoretic painting	Tilt protection system
Foldable guardrail	Foam-filled non-marking tires	Auto braking system
Overload sensing system	Oscillating axle	Fault diagnosis system
Horn & buzzer	Drivable at full height	
Options & Accessories		
AC power cable to platform	Platform work light	Overhead anti-collision device
Telematics-ready connector	7.4m platform	

SINOBOOM™

PARTNERS IN ACCESS™

SINOBOOM.COM | SALES@SINOBOOM.COM




NO.128 EAST JINZHOU AV., NINGXIANG HI-TECH INDUSTRY PARK, CHANGSHA, HUNAN, CHINA, 410600

ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS

1018RD (3369RD) / 1218RD (4069RD)

Compliant with CE/ANSI/CSA/EAC/AS standards

Model	1018RD (3369RD)	1218RD (4069RD)
Dimensions		
Max Working Height	12 m (39'4.4")	14.2 m (46'10.7")
A Max Platform Height	10 m (32'9.7")	12.2 m (40'0.3")
B Max Horizontal Reach	1.5 m (4'11.1")	1.5 m (4'11.1")
C Length-Stowed (With/Without outriggers)	3.8 m/3.19 m (12'5.6"/10'5.6")	3.8 m/3.19 m (12'5.6"/10'5.6")
D Width-Stowed	1.78 m (5'10")	1.78 m (5'10")
E Height-Stowed (Rails Folded)	1.94 m (6'4.4")	2.1 m (6'10.7")
E Height-Stowed (Rails Unfolded)	2.56 m (8'4.8")	2.73 m (8'11.5")
F Wheelbase	2.28 m (7'5.8")	2.28 m (7'5.8")
Ground Clearance	0.22 m (8.66")	0.22 m (8.66")
Platform Size (L×W×H)	2.8 m×1.6 m×1.1 m (9'2.2"×5'3"×3'7.3")	2.8 m×1.6 m×1.1 m (9'2.2"×5'3"×3'7.3")
Performance		
Platform Capacity	450 kg (992 lbs)	365 kg (805 lbs)
Extension Platform Capacity	140 kg (309 lbs)	140 kg (309 lbs)
Max Platform Occupants (Indoor/Outdoor)	4 persons/2 persons	3 persons/2 persons
Drive Speed (Stowed)	0 ~ 5.6 km/h (0 ~ 3.5mph)	0 ~ 5.6 km/h (0 ~ 3.5 mph)
Drive Speed (Raised)	0 ~ 0.48 km/h (0 ~ 0.3 mph)	0 ~ 0.48 km/h (0 ~ 0.3 mph)
Lift Time (Unloaded)	42 s ~ 52 s	55 s ~ 65 s
Lower Time (Unloaded)	40 s ~ 50 s	50 s ~ 60 s
Gradeability	35 %	35 %
Tilt Rating (Front-to-back)	3°	3°
Tilt Rating (Side-to-side, Outriggers Retracted/Deployed)	2° /0.8°	2° /0.8°
Max Outrigger Levelling (Front-to-back)	5.3° (front) /4.2° (back)	5.3° (front) /4.2° (back)
Max Outrigger Levelling (Side-to-side)	11.7°	11.7°
Turning Radius (Inside/Outside)	2.11 m/4.6 m (6'11.1"/15'1.1")	2.11 m/4.6 m (6'11.1"/15'1.1")
Tire Spec/Type	26×12-16.5/Solid	26×12-16.5/solid
Power		
Drive × Steer	4 WD×2 WS	4 WD×2 WS
Engine	Kubota D1105-E4B-EU-X1	Kubota D1105-E4B-EU-X1
Hydraulic Tank Capacity	72 L (15.8 gal (UK)/19 gal (US))	72 L (15.8 gal (UK)/19 gal (US))
Fuel Tank Capacity	48 L (10.6 gal (UK)/12.7 gal (US))	48 L (10.6 gal (UK)/12.7 gal (US))
Battery	12 V, 60 Ah	12 V, 60 Ah
System Voltage	12 VDC	12 VDC
Weight		
Weight (With outriggers/Without outriggers)	4,110 kg (9,061 lbs) 3,650 kg (8,046 lbs)	5,180 kg (11,420 lbs) 4,720 kg (10,406 lbs)
Standards Compliance	CE/ANSI/CSA/EAC/AS	

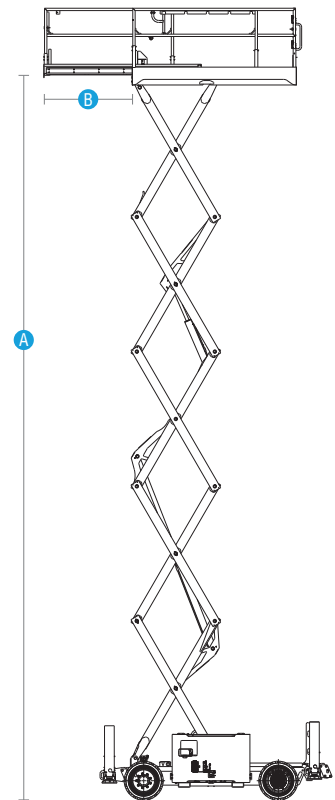

We reserve the right to make specification. The above represents the current specifications at time of publications. 10. 2025

Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

1.500+

kurumsal müşteri

CE belgeli

kontrollü teslimat

Türkiye geneli

nakliye

7/24

saha desteği

İLETİŞİM

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor