

MAKASLI PLATFORM

1215ET (3962ET)

Akülü makaslı platform

ÜRETİCİ · SİNOBOOM



+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor

ELECTRIC POWERED CRAWLER SCISSOR LIFTS

1215ET (3962ET)

Compliant with CE/EAC standards

HIGHLIGHTS

Efficient and Flexible

- Single joystick controls steering and walking, easy to operate
- Pivot steering, maneuverable and flexible
- Supports one-click outrigger leveling, strong site adaptability, safety and worry-free

Reliable Quality

- Steel tracks with rubber plate, large load-bearing, wear-resistant, suitable for various complex road surfaces
- AC motor drive, high efficiency, lifetime maintenance-free
- 8 maintenance-free batteries, zero emissions, long battery life

Reduce Maintenance Costs

- Drawer-type door tray, easy and fast inspection and maintenance of key components
- Human-computer interaction interface, wide-screen display, fault self-diagnosis, intelligent and efficient
- Automotive-grade electrophoresis process, anti-corrosion and anti-rust, long service life



Standard Features		
Steel track with rubber plate	Forklift pockets and lifting points	Fold-down platform
Manual storage container	Maintenance-free battery	Warning light
Buzzer	Proportional control	Auto braking system ring system
Tilt protection system	Emergency stop	Emergency lower button
External power interface	Fault diagnosis system	Electrophoretic painting
Options & Accessories		
Rubber track	RCBO unit	Platform work light
Foot switch	Overhead anti-collision device	Weighing system
AC power device on platform	GPS remote monitoring system	Non-marking track

SINOBOOM™


PARTNERS IN ACCESS™

SINOBOOM.COM | SALES@SINOBOOM.COM

NO.128 EAST JINZHOU AV., NINGXIANG HI-TECH INDUSTRY PARK, CHANGSHA, HUNAN, CHINA, 410600

ELECTRIC POWERED CRAWLER SCISSOR LIFTS 1215ET (3962ET) Compliant with CE/EAC standards

Model	1215ET (3962ET)
Dimensions	
Max Working Height	14 m (45'11.2")
A Max Platform Height	12 m (39'4.4")
B Platform Extension	0.9 m (2'11.4")
C Machine Length	2.79 m (9'1.8")
D Machine Width	1.58 m (5'2.2")
E Machine Height (Rails Folded)	2.06 m (6'9.1")
E Machine Height (Rails Unfolded)	2.69 m (8'9.9")
F Wheelbase (Steel Track/Rubber track)	1.782 m/1.738 m (5'10.2"/5'8.4")
G Axle-base (Steel Track/Rubber track)	1.11 m/1.17m (3'7.7"/3'10.1")
Ground Clearance	0.125 m (4.9")
Platform Size (L×W×H)	2.30 m×1.15 m×1.1 m (7'6.5"×3'9"×3'7.3")
Performance	
Platform Capacity	320 kg (705.6 lbs)
Extension Platform Capacity	120 kg (265 lbs)
Max Platform Occupants	2 Persons
Drive Speed (at and below the secondary descent height)	0 ~ 2.4 km/h (0 ~ 1.5 mph)
Drive Speed (above the secondary descent height)	0 km/h (0 mph)
Lift Time (Unloaded)	63 s~68 s
Lower Time (Unloaded)	55 s~60 s
Gradeability	30%
Max Allowable Inclination (front-to-back, ≤ 7.2m/ > 7.2m)	3° /0.5°
Max Allowable Inclination (side-to-side, ≤ 7.2m/ > 7.2m)	2° /0.5°
Max Outrigger Leveling Angle (front-to-back)	7°
Max Outrigger Leveling Angle (side-to-side)	12°
Max Allowable Side Force	400 N (90 lbf)
Max Allowable Wind Speed (Indoor/Outdoor)	0/12.5 m/s (0/28 mph)
Power	
Power Unit Motor (V/kW)	48 V DC, 5 kW
Hydraulic System Pressure	21 MPa (210 bar)
Hydraulic Tank Capacity	20 L (4.5 gal (UK)/5.25 gal (US))
Battery Specs (quantity×voltage, capacity)	8*6V, 290 Ah, 20 h (Tianneng) 8*6V, 260 Ah, 20 h (Discover)
System Voltage / Control Voltage	48 VDC / 24 VDC
Charger (Input/Output)	100 ~ 240 V AC/35A
Drive Motor (Voltage/Power)	48 V DC/4 kW
Weight	
Weight(Steel track (standard) / Rubber track (optional))	3,690 kg (8,135 lbs)/3,650 kg (8,046 lbs)
Standards Compliance	CE/EAC

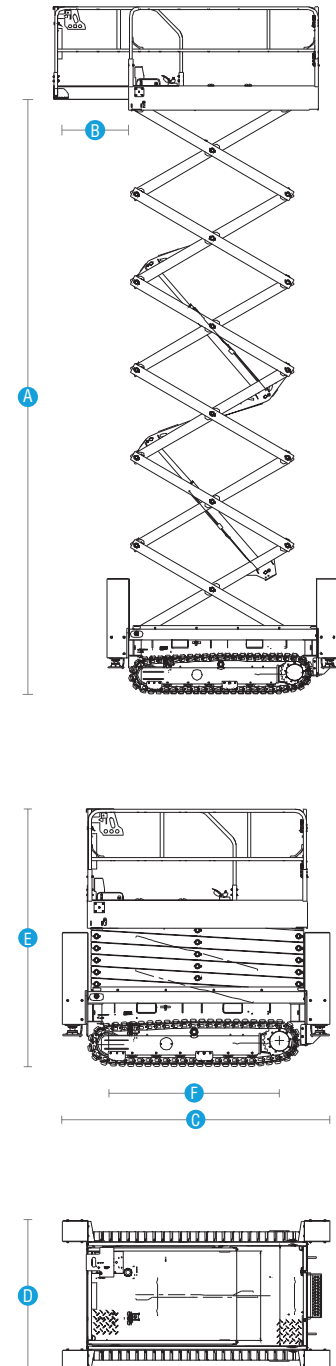

We reserve the right to make specification. The above represents the current specifications at time of publications. 10. 2025

Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

1.500+

kurumsal müşteri

CE belgeli

kontrollü teslimat

Türkiye geneli

nakliye

7/24

saha desteği

İLETİŞİM

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor