


MAKASLI PLATFORM

1323RD (4389RD) ,1623RD (5389RD)

Dizel makaslı platform

ÜRETİCİ · SİNOBOOM

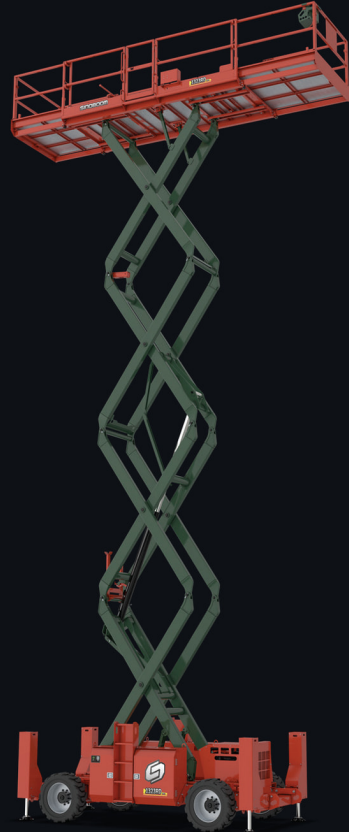

+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor

ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS

1323RD (4389RD) / 1623RD (5389RD)

Compliant with CE/ANSI/CSA/AS/EAC standards


PRODUCT HIGHLIGHTS

Excellent performance

- Better drive and working performance on rough terrains based on improved chassis and active oscillating function
- Smoother dual slide-out extension platform is available for locking at any positions
- Optimum working efficiency with one button for auto levelling outriggers

Easy maintenance

- It provides better access to reach all components installed on two sides of chassis
- Slide-out engine tray makes engine completely accessible
- Quick fault inquiry thanks to on-board diagnostic system

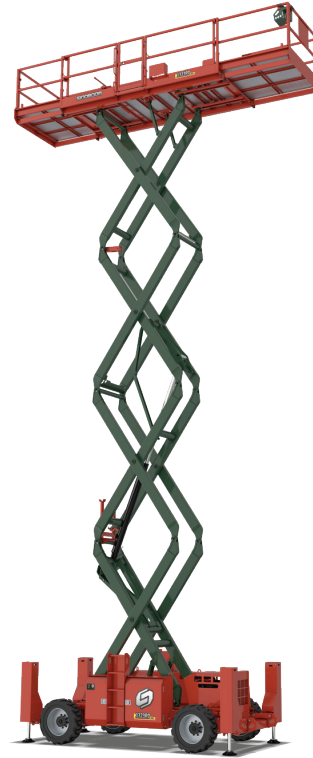

Standard Features		
4 WD × 2 WS	Forklift pockets	Lifting and tie-down points
Document box	Electrophoretic painting	Proportional controls
Emergency stop	Dual slide-out extension platform	Emergency lowering system
Foldable guardrail	Horn & buzzer	Auto braking system
Tilt alarm	Motion alarm	Load sensing system
Drivable at full height (1323RD only)	Flashing beacon	Fault diagnosis system
Active oscillating function	Auto-levelling hydraulic outriggers	Foam-filled tires
Telematics-ready connector		
Options & Accessories		
AC power to platform	Foam-filled non-marking tires	Solid tires
Solid non-marking tires	7.4m platform	Pipe cradle
Generator	Cold weather package	

SINOBOOM™

PARTNERS IN ACCESS™

SINOBOOM.COM | SALES@SINOBOOM.COM




NO.128 EAST JINZHOU AV., NINGXIANG HI-TECH INDUSTRY PARK, CHANGSHA, HUNAN, CHINA, 410600

ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS

1323RD (4389RD) / 1623RD (5389RD)

Compliant with CE/ANSI/CSA/AS/EAC standards

Model	1323RD (4389RD)	1623RD (5389RD)
Dimensions		
Max.Working Height	15.1 m (49'6.5")	18.2 m (59'8.5")
A Max.Platform Height	13.1 m (42'11.7")	16.2 m (53'1.8")
B Platform Extension (Front/Back)	1.5 m/1.2 m (4'11.1"/3'11.2")	1.5 m/1.2 m (4'11.1"/3'11.2")
C Overall Length	4.88 m (16')	4.88 m (16')
D Overall Width	2.31 m (7'7")	2.31 m (7'7")
E Height-Stowed (Rails Folded)	2.20 m (7'2.6")	2.42 m (7'11.3")
E Height-Stowed (Rails Unfolded)	2.96 m (9'8.5")	3.18 m (10'5.2")
F Wheelbase	2.85 m (9'4")	2.85 m (9'4")
Ground Clearance	0.36 m (1'2.2")	0.36 m (1'2.2")
Platform Size (L×W×H) (6.5m Platform)	3.96 m×1.82 m×1.1 m (13'×6'×3'7")	3.96 m×1.82 m×1.1 m (13'×6'×3'7")
Platform Size (L×W×H) (7.4m Platform)	4.84 m×1.82 m×1.1 m (15'10.6"×6'×3'7")	4.84 m×1.82 m×1.1 m (15'10.6"×6'×3'7")
Performance		
Platform Capacity	680 kg (1,499 lbs)	680 kg (1,499 lbs)
Capacity on Platform Extension	227 kg (500 lbs)	227 kg (500 lbs)
Max.Platform Occupants (Indoor/Outdoor)	7 Persons/7 Persons	4 Persons/4 Persons
Drive Speed (Stowed)	6.1 km/h (3.8 mph) Yanmar engine 5.0 km/h (3.1 mph) Kubota engine	6.1 km/h (3.8 mph) Yanmar engine 5.0 km/h (3.1 mph) Kubota engine
Drive Speed (Raised)	1.1 km/h (0.7 mph)	1.1 km/h (0.7 mph)
Lift Time (Unloaded)	50 s ~ 60 s	70 s ~ 90 s
Lower Time (Unloaded)	34 s ~ 44 s	45 s ~ 55 s
Gradeability	40%	40%
Tilt Rating (Front-to-Back)	3°	3°
Tilt Rating (Side-to-Side)	2°	2°
Max.Outrigger Levelling (Front-to-Back)	7°	7°
Max.Outrigger Levelling (Side-to-Side)	12°	12°
Turning Radius (Inside/Outside)	2.2 m/5.3 m (7'2.6"/17'4.7")	2.2 m/5.3 m (7'2.6"/17'4.7")
Tire Spec/Type	315/55D20/Foam-Filled	315/55D20/Foam-Filled
Power		
Drive × Steer	4 WD×2 WS	4 WD×2 WS
Engine (Brand/Model/Power/Emissions)	Yanmar 4TNV88C-DFLT 35.5 kW (EPA Tier 4/EU Stage 5) Yanmar 4TNV88-ZCDCS12 35.3 kW (China 4) Kubota D1105-E4B-EU-X1 18.2KW Kubota V2403-CR-TIE4B-SPB-1 39.6KW (EPA Tier 4) Kubota V2403BM-DI-CT04 36.5KW (China 4) DEUTZ D2011L031 36.3KW(EU Stage 3)	
Hydraulic Tank Capacity	107 L (23.5 gal (UK)/28 gal (US))	107 L (23.5 gal (UK)/28 gal (US))
Fuel Tank Capacity	110 L (24 gal (UK)/29 gal (US))	110 L (24 gal (UK)/29 gal (US))
Weight		
Weight	7,380 kg/7,170 kg (16,270 lbs/15,807 lbs)	8,210 kg/8,000 kg (18,100 lbs/17,637 lbs)
Standards Compliance	CE/ANSI/CSA/AS/EAC	

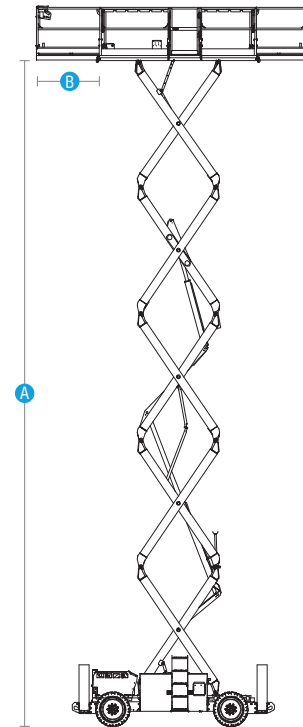

We reserve the right to make specification. The above represents the current specifications at time of publications. 12. 2025

Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

1.500+

kurumsal müşteri

CE belgeli

kontrollü teslimat

Türkiye geneli

nakliye

7/24

saha desteği

İLETİŞİM

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor