

MAKASLI PLATFORM

1323RE (4389RE) 1623RE (5389RE)

Akülü makaslı platform

ÜRETİCİ · SİNOBOOM



+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor

ELECTRIC ROUGH TERRAIN SCISSOR LIFTS

1323RE (4389RE) / 1623RE (5389RE)

Compliance with CE/ANSI/EAC standards

PRODUCT HIGHLIGHTS

Excellent Performance

- Powerful platform capacity for unprecedented efficiency
- Two-way extendable platform, spacious working platform
- Wide-angle tilt, one-click outrigger leveling

Strong Off-road Performance

- Up to 40% gradeability, easily handling outdoor needs
- Stable movement, copes well with potholed ground

Easy Maintenance

- Integrated pipeline assembly, convenient for troubleshooting
- Double-door design for easy maintenance, spacious area for maintenance

Green

- Comfortable working environment without noise pollution
- Meet indoor or emissions-critical site requirements

Economical

- Battery quality assurance, low failure rate and reduced maintenance costs compared with diesel power, which reduces overall operating cost



Standard Features		
4WD×2WS	Forklift pockets and lifting points	Proportional control
Manual storage box	Maintenance-free battery	Emergency lowering system
Emergency stop	Electrophoretic painting	Tilt protection system
RCBO with AC power cable	Fault diagnosis system	Auto braking system
Fold-down platform	Buzzer	Two platform extensions
Options & Accessories		
Non-marking tires	Industrial power device on platform	7.4m platform

SINOBOOM™

PARTNERS IN ACCESS™

SINOBOOM.COM | SALES@SINOBOOM.COM




NO.128 EAST JINZHOU AV., NINGXIANG HI-TECH INDUSTRY PARK, CHANGSHA, HUNAN, CHINA, 410600

ELECTRIC ROUGH TERRAIN SCISSOR LIFTS

1323RE (4389RE) / 1623RE (5389RE)

Compliance with CE/ANSI/EAC standards

Model	1323RE (4389RE)	1623RE (5389RE)
Dimensions		
Max Working Height	15.1 m (49'6.5")	18.2 m (59'8.5")
A Max Platform Height	13.1 m (42'11.7")	16.2 m (53'1.8")
B Max Horizontal Extension	1.5 m/1.2 m (4'11.1"/3'11.2")	1.5 m/1.2 m (4'11.1"/3'11.2")
C Length-Stowed (Outriggers/Without Outriggers)	4.88 m (16')	4.88 m (16')
D Width-Stowed	2.28 m (7'5.7")	2.28 m (7'5.7")
E Height-Stowed (Rail Folded)	2.2 m (7'2.6")	2.42 m (7'11.3")
E Height-Stowed (Rail Unfolded)	2.96 m (9'8.5")	3.18 m (10'5.2")
F Wheelbase	2.84 m (9'3.8")	2.84 m (9'3.8")
Ground Clearance	0.36 m (1'2.2")	0.36 m (1'2.2")
Platform Dimensions (LxWxH) (6.5m Platform)	3.96m × 1.82m × 1.1m (13' × 6' × 3'7")	3.96 m × 1.82 m × 1.1 m (13' × 6' × 3'7")
Platform Dimensions (LxWxH) (7.4m Platform)	4.84m × 1.82m × 1.1m (15'10.6" × 6' × 3'7")	4.84 m × 1.82 m × 1.1 m (15'10.6" × 6' × 3'7")
Performance		
Platform Capacity	680 kg (1,499 lbs)	680 kg (1,499 lbs)
Extension Platform Capacity	227 kg (500 lbs)	227 kg (500 lbs)
Platform Allowable Occupants (Indoor/Outdoor)	7 Persons/7 Persons	4 Persons/4 Persons
Drive Speed (Stowed)	0~5.3 km/h (0~3.3 mph)	0~5.3 km/h (0~3.3mph)
Drive Speed (Raised)	0~1.1 km/h (0~0.68 mph)	0~1.1 km/h (0~0.68mph)
Lift Time (Unloaded)	50 s~60 s	70s~90s
Lower time (Unloaded)	34 s~44 s	45s~55s
Gradeability	40%	40%
Tilt Rating (Front to Back, Outrigger Retracted/Extended)	3° /0.5°	3° /0.5°
Tilt Rating (Side to Side, Outrigger Retred/Extend)	2° /0.5°	2° /0.5°
Max Outrigger Leveling (Front to Back)	7°	7°
Max Outrigger Leveling (Side to Side)	12°	12°
Turning Radius (Inside/Outside)	2.2 m/5.3 m (7'2.6"/17'4.7")	2.2m/5.3m (7'26"/17'4.7")
Tire Spec/Type	33 × 12-20 /solid	33 × 12-20 /solid
Power		
Drive × Steer	4 WD × 2 WS	4 WD × 2 WS
Batteries	48 V, 480 Ah (Lead-acid battery) 51.2 V, 500 Ah (Lithium battery)	48 V, 480 Ah (Lead-acid battery) 51.2 V, 500 Ah (Lithium battery)
Hydraulic Tank Capacity	110 L (24 gal (UK)/29 gal (US))	110 L (24 gal (UK)/29 gal (US))
System Voltage	48 V DC	48 V DC
Weight		
Weight (Without / With Range Extender)	7,970 kg (17,570 lbs)/ 8,360 kg (18,430 lbs)	8,800 kg (19,400 lbs)/ 9,190 kg (20,260 lbs)
Standards Compliance	CE/ANSI/EAC	

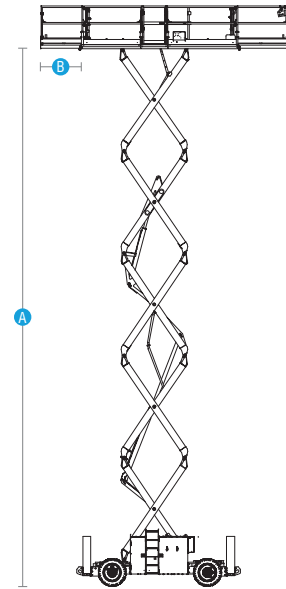

We reserve the right to make specification. The above represents the current specifications at time of publications. 10. 2025

Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

1.500+

kurumsal müşteri

CE belgeli

kontrollü teslimat

Türkiye geneli

nakliye

7/24

saha desteği

İLETİŞİM

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor