

EKLEMLİ PLATFORM

AB18EJ PLUS (AB610EJ PLUS)

Akülü eklemli platform

ÜRETİCİ · SİNOBOOM




+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor

ELECTRIC ARTICULATING BOOM LIFTS

AB18EJ PLUS (AB610EJ PLUS)

Compliant with GB/CE/EAC/AS standards

PRODUCT HIGHLIGHTS

Operational Efficiency & Safety

- High load capacity (250/340kg)
- Increases single-operation workload while ensuring safer operation

Working Condition Adaptability

- Large working range, and obstacle-crossing height
- Suitable for diverse and complex construction scenarios

Business Expandability

- 4WD×4WS meets high-end demands
- Expands the scope of rental business

Usability

- Range extenders adapt to scenarios with insufficient charging



Standard Features		
Active oscillating function	Platform rotation function	Max tilt rating to 5°
Automotive-grade sleeves for all pipes	Four-wheel brake	Flashing Beacon
Tilt protection system	Weighting system	Fault diagnosis system
Emergency stop system	Emergency lowering system	Rear position and travel confirmation
Mechanical release for travel braking	Horn & buzzer	Continuous turntable rotation in 360°
7-in smart screen	Proportional control with 3 joysticks	Anti-pinch device
Lead-acid battery	Platform with inward swinging gate (2.44 × 0.91 × 1.1 m)	
Options & Accessories		
AC power line to the platform	Solid tire	Non-marking tire
Range extender	Four-wheel steering	Working light
Anti-collision device	Manual storage box	Lithium battery
Glass bracket (for platform swinging gate)	Tool box (for platform swinging gate)	Half-height guardrail (for platform swinging gate)

SINOBOOM™

PARTNERS IN ACCESS™

SINOBOOM.COM | SALES@SINOBOOM.COM



NO.128 EAST JINZHOU AV., NINGXIANG HI-TECH INDUSTRY PARK, CHANGSHA, HUNAN, CHINA, 410600

ELECTRIC ARTICULATING BOOM LIFTS

AB18EJ PLUS (AB610EJ PLUS)

Compliant with GB/CE/EAC/AS standards

Model	AB18EJ PLUS (AB610EJ PLUS)
Dimensions	
Max Platform Height	18.58 m (60'11")
Max Working Height	20.58 m (67'6")
Max Horizontal Reach (250 kg/340 kg)	12 m/10.7 m (39'4"/35'1")
Max Horizontal Working Envelope (250 kg/340 kg)	12.6 m/11.3 m (41'4"/37'1")
Max Up and Over Clearance	7.98 m (26'2")
A Machine Length (Stowed/Transport)	8.8 m (28'10")
B Machine Width (Stowed/Transport)	2.49 m (8'2")
C Machine Height (Stowed/Transport)	2.54 m (8'4")
D Wheelbase	2.49 m (8'2")
Ground Clearance	0.36 m (1'2")
Platform Size (L×W×H)	2.44×0.91×1.1 m (8'×3'×3'7")
Performance	
Max Platform Capacity (Unrestricted/Restricted)	250 kg/340 kg (551 lbs/750 lbs)
Max Platform Occupancy	2 persons
Drive Speed (Stowed/Raised)	0 ~ 4.8 km/h (0 ~ 3 mph) 0 ~ 1.1 km/h (0 ~ 0.68 mph)
Gradeability (4WD)	45%
Turntable Rotation (Angle/Continuity)	360° / Continuous
Platform Rotation	180°
Tilt Rating	5°
Turning Radius (Inside/Outside)—Two-wheel steering	2.4 m/5.55 m (7'10"/18'3")
Turning Radius (Inside/Outside)—Four-wheel steering	1.63 m/3.59 m (5'4"/11'9")
Turntable Tail-swing	0.78 m (2'7")
Max Allowable Side Force	400 N (90 lbf)
Max Allowable Wind Speed	12.5 m/s (28 mph)
Tire Spec/Type	355/55D625 (foam-filled) 36×14-20 (solid)
Power	
Drive×Steer	4 WD×2 WS (4WS)
Hydraulic Tank Capacity	130 L (28.6 gal (UK)/34.3 gal (US))
Hydraulic System Pressure	22 MPa (3191 Psi)
Battery (Voltage/Capacity)	2×24 V, 480 Ah (5 hr) (lead acid battery) 51.2 V / 500 Ah (lithium battery)
Control Voltage	12V DC
Weight	
Weight (Lithium battery I / Lithium battery II -range extender/ lead acid battery)	9,600 kg (21,164 lbs) / 9,950 kg (21,936 lbs) / 10,150 kg (22,377 lbs)
Standards Compliance	GB/CE/EAC/AS

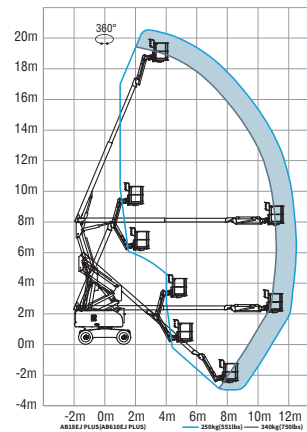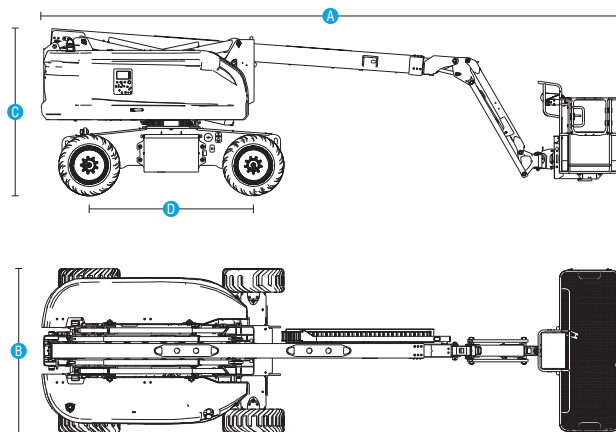

We reserve the right to make specification. The above represents the current specifications at time of publications. 07. 2026

Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

1.500+

kurumsal müşteri

CE belgeli

kontrollü teslimat

Türkiye geneli

nakliye

7/24

saha desteği

İLETİŞİM

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor