

EKLEMLİ PLATFORM

AB18J PLUS (AB610J PLUS)

Dizel eklemli platform

ÜRETİCİ · SİNOBOOM




+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor

ENGINE POWERED ARTICULATING BOOM LIFTS

AB18J PLUS (AB610J PLUS)

Compliant with GB/CE/EAC/AS standards

HIGHLIGHTS

Enhanced Working Performance

- Maintains leading performance in maximum working height, horizontal outreach, and up-and-over clearance
- Maximum platform capacity to 340 kg (750 lbs), enabling more tools and personnel, improving job efficiency
- Active oscillating function in both working and stowed states, and a tilt rating of up to 5°, providing adaptability to more rugged road surfaces and strong field operation ability

Advanced Operator Experience

- Equipped with a 7" intelligent HMI display for smoother operation, easier maintenance, and enhanced user experience
- 4WD + 4WS high-performance configuration for great gradeability, off-road capability, and smooth maneuverability

Durable & Cost-Efficient

- Reinforced, optimized structural design improves durability and extends service life
- High parts compatibility across models improves service efficiency and reduces total cost of ownership



Standard Features		
Full-time oscillation	Four-wheel brake	7-in smart screen
Continuous turntable rotation in 360°	Automotive sleeves for all pipes	Fault diagnosis system
Hydraulic leveling for platform	Platform rotation function	Weighing system
Tilt protection system	Max allowable tilt angle at 5°	Rear position and travel confirmation
Rotating warning light for safety warning	Buzzer	Mechanical release for travel braking
Emergency stop system	Emergency lowering system	Platform with inward swinging gate (2.44 × 0.91 × 1.1 m)
Proportional control with 3 joysticks	Secondary Guarding device	
Options & Accessories		
AC power device on platform	Solid tire	Non-marking tire
Working light on the platform	Four-wheel steering	Hydraulic generator
Glazier kit bracket (for platform with inward swinging gate)	Overhead anti-collision device	T-BOX(GPS)
Half-height guardrail (for platform with inward swinging gate)	Tool box (for platform with inward swinging gate)	Manual storage box

SINOBOOM™

PARTNERS IN ACCESS™

SINOBOOM.COM | SALES@SINOBOOM.COM



NO.128 EAST JINZHOU AV., NINGXIANG HI-TECH INDUSTRY PARK, CHANGSHA, HUNAN, CHINA, 410600

ENGINE POWERED ARTICULATING BOOM LIFTS

AB18J PLUS (AB610J PLUS)

Compliant with GB/CE/EAC/AS standards

Model	AB18J PLUS (AB610J PLUS)
Dimensions	
Max Platform Height	18.58 m (60'11")
Max Working Height	20.58 m (67'6")
Max Horizontal Reach (250 kg/340 kg)	12 m/10.7 m (39'4"/35'1")
Max Horizontal Working Envelope (250 kg/340 kg)	12.6 m/11.3 m (41'4"/37'1")
Max Up and Over Clearance	7.98m (26'2")
A Machine Length (Stowed/Transport)	8.8 m (28'10")
B Machine Width (Stowed/Transport)	2.49 m (8'2")
C Machine Height (Stowed/Transport)	2.54 m (8'4")
D Wheelbase	2.49 m (8'2")
Ground Clearance	0.42 m (1'5")
Platform Size (L×W×H)	2.44 m × 0.91 m × 1.1 m (8' × 3' × 3'7")
Performance	
Max Platform Capacity (Restricted /Unrestricted)	340 kg /250 kg (750 lbs/551 lbs)
Max Platform Occupants	2 persons
Drive Speed (Stowed)	0 ~ 4.8 km/h (0 ~ 3 mph)
Drive Speed (Raised)	0 ~ 1.1km/h (0 ~ 0.68 mph)
Gradeability	40%
Turntable Rotation	360° /Continuous
Platform Rotation	180°
Tilt Rating	5°
Turning Radius (Inside/Outside)- Two-wheel steering	2.4 m/5.55 m (7'10" / 18'3")
Turning Radius (Inside/Outside)- Four-wheel steering	1.63 m/3.59 m (5'4" / 11'9")
Turntable Tail-Swing	0.78 m(2'7")
Max Allowable Side Force	400 N (90 lbf)
Max Allowable Wind Speed	12.5 m/s (28 mph)
Tire Spec/Type	355/55D625 (foam-filled) 36×14-20 (solid)
Power	
Drive × Steer	4 WD × 2 WS (4 WS)
Engine	36.4 kW /2200 rpm/D2.9 L4 / Deutz /EU Stage V 36.4 kW /2200 rpm/D2.9 L4 / Deutz / EPA Tier 4F 36 kW/2500 rpm/F2.8CS449 / Cummins / China T4 43 kW/2500 rpm/QSF2.8T3NA60 / Cummins /China T3、 EU Stage 3A 36.8 kW/2200 rpm/YCF3050 / Yuchai /China T4 36.5 kW/2400 rpm/YCF3050 / Yuchai /China T3
Hydraulic Tank Capacity	130 L (28.6 gal (UK)/34.3 gal (US))
Diesel Tank Capacity	100 L (22.0 gal (UK)/26.4 gal (US))
System Voltage	12 V DC
Weight	
Overall Weight (2WS / 4WS)	9,500 kg (20,944 lbs)/9,620 kg (21,208 lbs)
Standards Compliance	GB/CE/EAC/AS

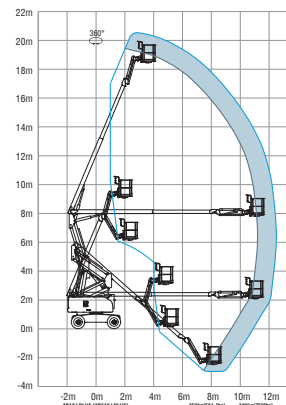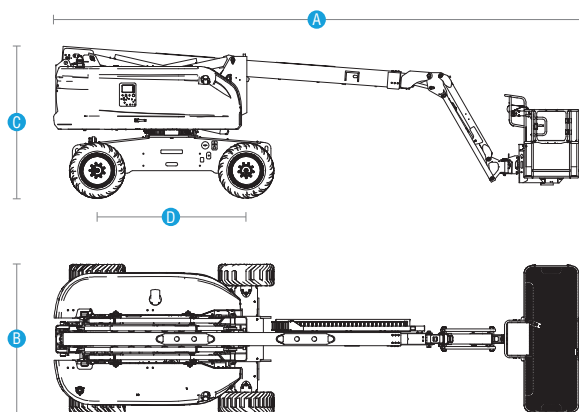

We reserve the right to make specification. The above represents the current specifications at time of publications. 04. 2026

Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

1.500+

kurumsal müşteri

CE belgeli

kontrollü teslimat

Türkiye geneli

nakliye

7/24

saha desteği

İLETİŞİM

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor