

MAKASLI PLATFORM

JCPT1212HA-ANSI

Akülü makaslı platform

ÜRETİCİ · DİNGLİ



+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor

DINGLI
Exceed · New Height

JCPT1212HA

Self-propelled Scissor Lifts

SPECIFICATIONS

Size	Metric	British
Max. Working Height(Indoor) A	12.00m	39ft 4in
Max. Working Height(Outdoor)	12.00m	39ft 4in
Max. Platform Height(Indoor) B	10.00m	32ft 10in
Max. Platform Height(Outdoor)	10.00m	32ft 10in
Overall Length C	2.48m	8ft 2in
Overall Width D	1.15m	3ft 9in
Overall Height(Rails Up) E	2.49m	8ft 2in
Overall Height(Rails Down) F	1.96m	6ft 5in
Platform Size(Length×Width)	2.27m×1.12m	7ft 5in×3ft 8in
Platform Extension Size G	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	4in/1in
Wheelbase H	1.87m	6ft 2in
Turning Radius(Inside/Outside)	0m/2.20m	0in/7ft 3in
Tyres	φ381×127mm	φ381×127mm

Performance


S.W.L	318kg	701lb
S.W.L On Extension	113kg	249lb
Max. Occupants(Inside/Outside)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	3.5km/h	2.17mph
Travel Speed(Raised)	0.8km/h	0.50mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	55/49sec	55/49sec

Weight

Overall Weight	3050kg	6724lb
----------------	--------	--------

Power

Hydraulic Tank	20L	5.3gal
Lead-acid Battery	24V/200Ah	24V/200Ah
Lithium Battery	24V/220Ah	24V/220Ah
Charger	24V/30A	24V/30A
Lifting Motor	15VAC/3.5kW	15VAC/3.5kW

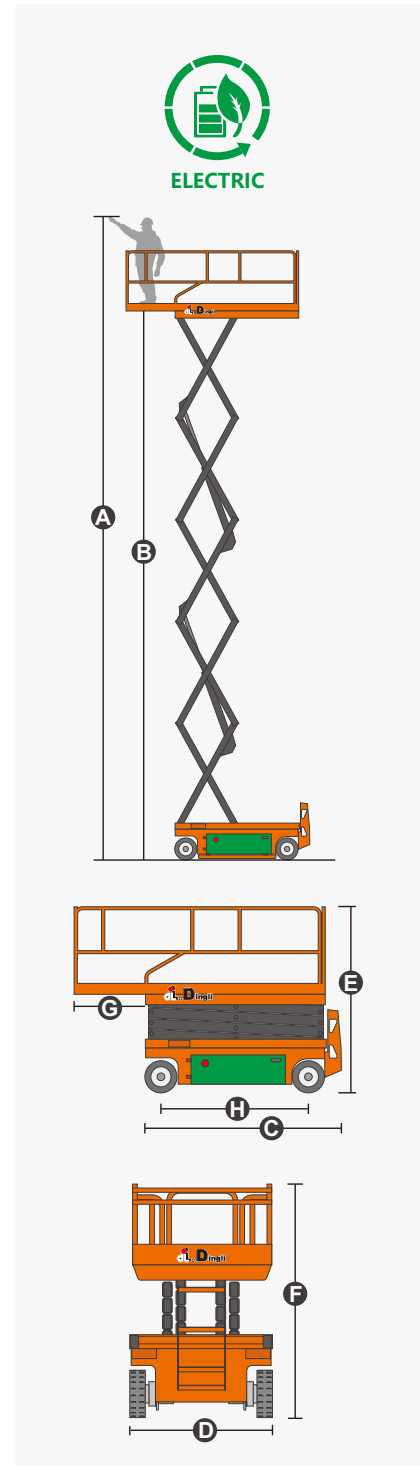

ANSI A92.20, CSA B354.6.17

Exceed · New Height

DINGLI
Exceed · New Height

JCPT1212HA
Self-propelled Scissor Lifts

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

[Https://en.cndingli.com](https://en.cndingli.com)

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.
2022-09



Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

1.500+

kurumsal müşteri

CE belgeli

kontrollü teslimat

Türkiye geneli

nakliye

7/24

saha desteği

İLETİŞİM

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor