

**SCISSOR LIFT**

Compact 10 DX / 12 DX

Diesel Scissor Lift

Models covered: Compact 10 DX, Compact 12DX

10.28_m

Working height

565_{kg}

Platform capacity

8.28_m

Platform height

3,520_{kg}

Weight

+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Product page

ROUGH TERRAIN SCISSOR LIFTS



COMPACT 10 / 12 DX



OUTSTANDING ROUGH TERRAIN DRIVING FEATURES

- > 4 wheel drive
- > Automatic differential lock
- > Excellent gradeability (40 %)
- > Ground clearance of 28 cm

ROBUST AND EASY TO MAINTAIN

- > Outriggers positioned within the machine footprint
- > Durable and reliable upper control box
- > Optimized accessibility to components
- > Built-in diagnostic tool

EXCEPTIONAL PRODUCTIVITY


- > Fully proportional controls
- > Narrow turning radius
- > One switch to deploy and retract 4 outriggers

COMPACT 10 / 12 DX

ROUGH TERRAIN SCISSOR LIFTS

TECHNICAL DATA

	COMPACT 10 DX	COMPACT 12 DX
Working height	10.28 m	12.06 m
Platform height	8.28 m	10.06 m
Lift capacity	565 kg (3 pers.)	450 kg (3 pers.)
Lift capacity on the extension	150 kg	150 kg
A Length	3.18 m	3.18 m
B Width	1.78 m	1.78 m
C Height - stowed	2.44 m	2.56 m
D Wheelbase	1.84 m	1.84 m
E Ground clearance	28 cm	28 cm
Storage height	1.59 m	1.7 m
F Platform length	2.45 m	2.45 m
G Platform width	1.45 m	1.45 m
Extended platform length	3.7 m	3.7 m
Platform extension length	1.2 m	1.2 m
Number of extensions	1	1
Drive speed	0.6 - 5.5 km/h	0.6 - 5.5 km/h
Maximum drive height	8.15 m	8.15 m
Turning radius - outside	3.5 m	3.5 m
Lift / lower speed	35 s / 46 s	35 s / 51 s
Engine	Kubota, 18.5 kW (Stage 5 in EU)	Kubota, 18.5 kW (Stage 5 in EU)
Gradeability	40 %	40 %
Tilt alarm	3 °	3 °
Tyres - foam-filled	26 x 12 - 16.5	26 x 12 - 16.5
Hydraulic system capacity	75 l	75 l
Weight	3 350 kg	3 965 kg

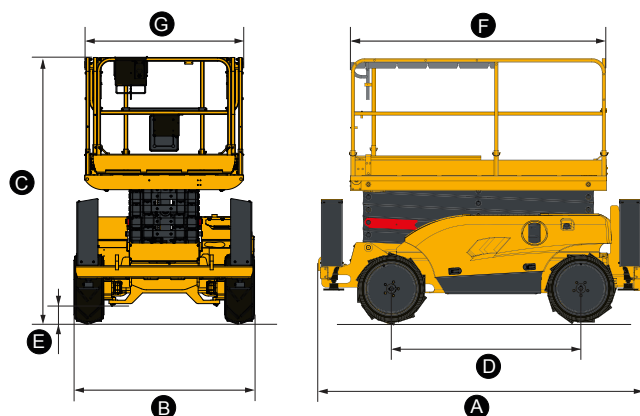


STANDARD EQUIPMENT

- > 4 wheel drive, 2 wheel steer
- > Brake release
- > Foam filled all terrain tyres
- > 1.2 m platform extension
- > Removable operator's control box
- > 3° Tilt alarm
- > Automatic levelling outriggers
- > Horn
- > Hourmeter
- > 12 V - 70 Ah batteries
- > Hydraulic brakes
- > Manual platform lowering valve
- > Lanyard attachment points
- > Towing hooks
- > Side shields

OPTIONS AND ACCESSORIES

- > Non marking tyres
- > 110 V power to the platform
- > Swing-door gate
- > Hydraulic generator 3.5 kW
- > Biodegradable oil
- > Cold Weather Package
- > Telematics ready
- > Motion alarm for movements and translation
- > Travel alarm
- > Rotating beacon
- > Working light
- > Foldable guard-rails

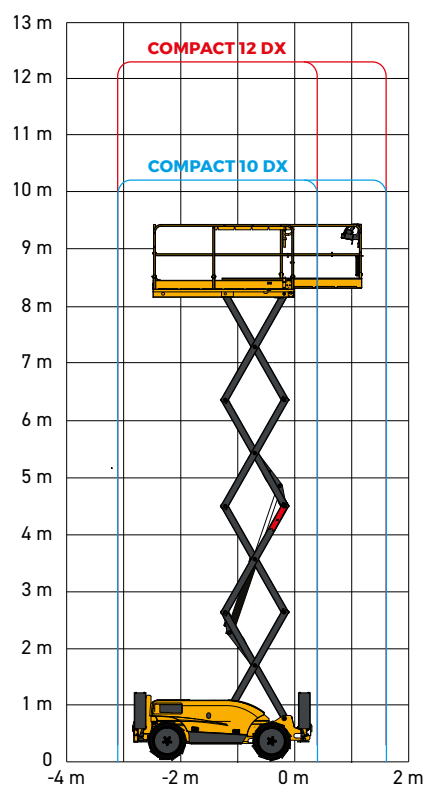

At height, you're safe with us

A large hire fleet of scissor, articulated, telescopic, vertical mast, trailer-mounted, tracked and truck-mounted platforms, delivered fully documented and well maintained. Let us help you choose the right machine.

- ✓ Free site survey and machine selection
- ✓ Periodic inspection and CE paperwork
- ✓ Operator training
- ✓ Transport and delivery across Türkiye
- ✓ Maintenance and on-site service throughout the hire
- ✓ 24/7 on-site support line

1,500+

corporate clients

CE-marked

inspected delivery

Across Türkiye

transport

24/7

on-site support

CONTACT


+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Product page