

SCISSOR LIFT

JCPT0808AC

Electric Scissor Lift

MANUFACTURER · DINGLI

+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ask on WhatsApp

DINGLI

Exceed · New Height

JCPT0808AC

Scissor Lifts

SPECIFICATIONS

Size	Metric	British
Max. Working Height A	8.00m	26ft 3in
Max. Platform Height B	6.00m	19ft 8in
Overall Length C	2.48m	8ft 2in
Overall Width D	0.83m	2ft 9in
Overall Height(Rails Up) E	2.23m	7ft 4in
Overall Height(Rails Down) F	1.87m	6ft 2in
Platform Size(Length×Width)	2.27m×0.81m	7ft 5in×2ft 8in
Platform Extension Size G	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	4in/1in
Wheelbase H	1.87m	6ft 2in
Turning Radius(Inside/Outside)	0m/2.10m	0in/6ft 11in
Tyres	φ381×127mm	φ381×127mm

Performance




S.W.L	380kg	837lb
S.W.L On Extension	113kg	249lb
Max. Occupants (Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	5.0km/h	3.10mph
Travel Speed(Raised)	0.8km/h	0.50mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	30/40sec	30/40sec

Weight

Overall Weight	2160kg	4761lb
----------------	--------	--------

Power

Hydraulic Tank	20L	5.3gal
Lead-acid Battery	24V/185Ah	24V/185Ah
Lithium Battery	24V/180Ah	24V/180Ah
Charger	24V/30A	24V/30A
Driving Motor	2×15VAC/0.87kW	2×15VAC/0.87kW
Lifting Motor	16VAC/3.5kW	16VAC/3.5kW

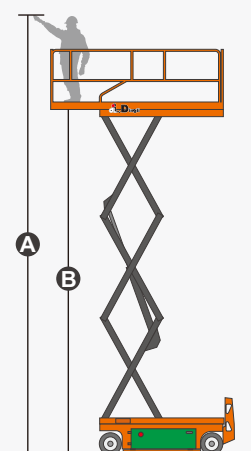

CE EN 280

Exceed · New Height

DINGLI

Exceed · New Height

JCPT0808AC

Scissor Lifts

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

[Https://en.cndingli.com](https://en.cndingli.com)

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.
2025-03



At height, you're safe with us

A large hire fleet of scissor, articulated, telescopic, vertical mast, trailer-mounted, tracked and truck-mounted platforms, delivered fully documented and well maintained. Let us help you choose the right machine.

- ✓ Free site survey and machine selection
- ✓ Periodic inspection and CE paperwork
- ✓ Operator training
- ✓ Transport and delivery across Türkiye
- ✓ Maintenance and on-site service throughout the hire
- ✓ 24/7 on-site support line

1,500+

corporate clients

CE-marked

inspected delivery

Across Türkiye

transport

24/7

on-site support

CONTACT**+90 216 999 95 99**

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



Ask on WhatsApp