


EKLEMLİ PLATFORM

AB16EJ PLUS (AB520EJ PLUS)

Akülü eklemli platform

ÜRETİCİ · SİNOBOOM

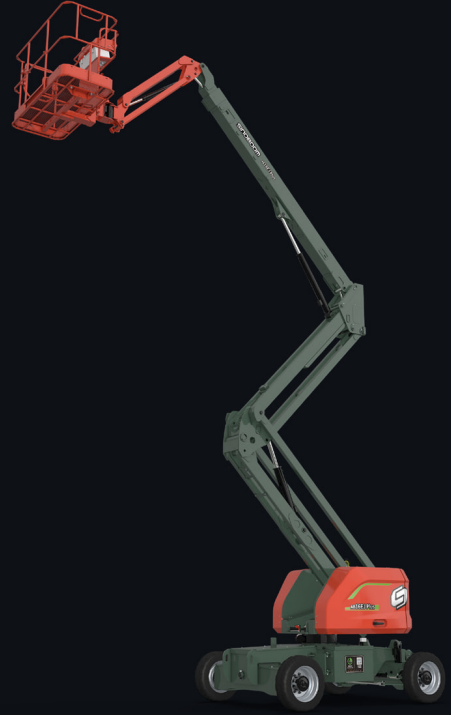


+90 216 999 95 99

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor

ELECTRIC ARTICULATING BOOM LIFTS

AB16EJ PLUS (AB520EJ PLUS)

Compliant with CE/ANSI/CSA/EAC standards

PRODUCT HIGHLIGHTS

Excellent Rough Terrain Performance

- Smooth off-road and quiet indoor and outdoor operation
- 4WD, 40% gradeability
- Standard active oscillating function, excellent terrain ability

Optimal Safety and Reliability

- 5 inch smart display for easy machine status and fault diagnosis
- Auxiliary power system, electrical emergency lowering
- Rexroth controller complies with ISO13849 standard
- Both main boom and secondly boom are equipped with dual channel angle sensors

Best Productivity and Easy Maintenance

- Triple load capacity of 250kg/340kg/454kg, max platform occupants up to 3 persons
- Standard AGM maintenance free battery minimizes maintenance cost as well as providing long working endurance
- AC brushless lift motor, maintenance free



Standard Features		
Active oscillating function	5-in display screen	4WD × 2WS
Proportional control	Automotive-grade sleeves for all pipes	Emergency lowering system
Hydraulic platform leveling	Max tilt rating to 5°	Weighing system
Tilt protection system	Horn & buzzer	Emergency stop system
Flashing beacon	Foot switch	Fault diagnosis system
Foam-filled non-marking tires	1.83m(6') platform with swinging gate	Manual storage box
Secondary guarding device	Telematics-ready connector	
Options & Accessories		
AC power to platform	Solid tires	1.45m (4'9") platform
2.44m(8') platform with swinging gate	Platform work light	Glazier kit
Half mesh	Overhead anti-collision device	

SINOBOOM™

PARTNERS IN ACCESS™

SINOBOOM.COM | SALES@SINOBOOM.COM



NO.128 EAST JINZHOU AV., NINGXIANG HI-TECH INDUSTRY PARK, CHANGSHA, HUNAN, CHINA, 410600

ELECTRIC ARTICULATING BOOM LIFTS

AB16EJ PLUS (AB520EJ PLUS)

Compliant with CE/ANSI/CSA/EAC standards

Model	AB16EJ Plus (AB520EJ Plus)
Dimensions	
Max Platform Height	15.8 m (51'10")
Max Working Height	17.8 m (58'5")
Max Horizontal Reach(250kg/340kg/454kg)	9 m/8.1 m/7 m (29'6"/26'7"/23')
Max Up and Over Clearance	7.9 m(25'11")
A Stowed Length	7.6 m(24'11")
B Stowed Width	2.3 m(7'7")
C Stowed Height	2.25 m(7'5")
Stowed Length (Transport)	6.1 m(20')
Stowed Width (Transport)	2.3 m(7'7")
Stowed Height (Transport)	3.1 m(10'2")
D Wheelbase	2.3 m(7'7")
Ground Clearance	0.35 m(1'2")
Platform Dimensions (L×W×H)	1.83 m × 0.85 m × 1.1 m(6' × 2'9" × 3'7")
Performance	
Max Platform Capacity (Unrestricted/Restricted/Restricted)	250 kg/340 kg/454 kg (551 lbs/750 lbs/1000 lbs)
Max Platform Occupants (Unrestricted/Restricted)	2 persons/3 persons
Drive Speed (Stowed)	5.5 km/h (3.4 mph)
Drive Speed (Raised)	1.1 km/h (0.68 mph)
Gradeability	40%
Turntable Rotation	355° / Non-continuous
Platform Rotation	180°
Tilt Rating	5°
Turning Radius (Inside/Outside)	1.8 m/4.78 (5'11"/15'8")
Turntable Tail-Swing	0.3 m (12")
Max Allowable Side Force	400 N (90 lbf)
Max Allowable Wind Speed	12.5 m/s (28 mph)
Tire Spec/Type	33 × 12 D610 (Foam-filled)
Power	
Drive × Steer	4 WD × 2 WS
Batteries	8 × 6 V, 335 Ah (5 hr)/390 Ah (20 hr) (lead acid battery) 48 V / 315 Ah (lithium battery)
Hydraulic Tank Capacity	64 L (14 gal (UK)/17 gal (US))
System Voltage	12V DC
Weight	
Weight	7,750 kg (17,086 lbs)
Standards Compliance	CE/ANSI/CSA/EAC

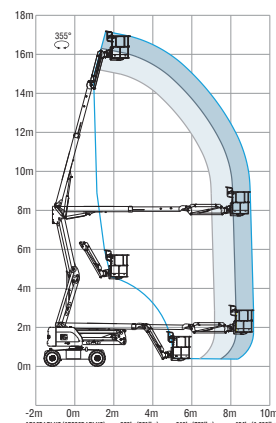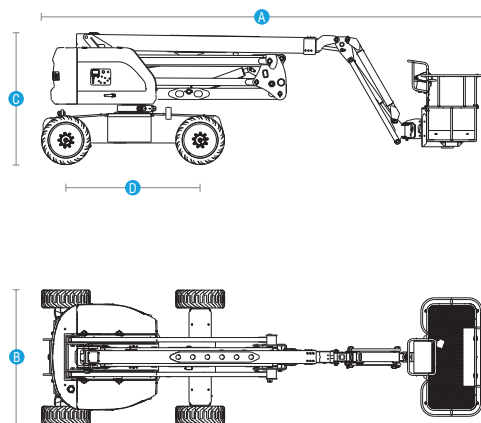

We reserve the right to make specification. The above represents the current specifications at time of publications. 10. 2025

Yükseklerde bizimle güvendesiniz

Makaslı, eklemli, teleskopik, dikey, çekilebilir, paletli ve araçüstü platformlardan oluşan geniş kiralık filo; belgeli ve bakımlı olarak teslim edilir. İhtiyacınıza uygun makineyi birlikte seçelim.

- ✓ Ücretsiz keşif ve makine seçimi
- ✓ Periyodik kontrol ve CE evrakları
- ✓ Operatör eğitimi
- ✓ Türkiye geneli nakliye ve teslimat
- ✓ Kiralama boyunca bakım ve yerinde servis
- ✓ 7/24 saha destek hattı

1.500+

kurumsal müşteri

CE belgeli

kontrollü teslimat

Türkiye geneli

nakliye

7/24

saha desteği

İLETİŞİM

+90 216 999 95 99

WhatsApp +90 536 915 98 11

info@skyriseplatform.com

skyriseplatform.com

İhlamurkuyu Mah. Şendal Sok. No: 2 · Ümraniye / İstanbul



WhatsApp ile sor